

# CMPE 150/L : Introduction to Computer Networks

Chen Qian

Computer Engineering  
UCSC Baskin Engineering

Lecture 11

# Midterm exam

- ❑ Midterm this Thursday
- ❑ Close book but one-side 8.5"x11" note is allowed (must use hand-writing!)
- ❑ Sample midterm and sample questions

# Chapter 4: outline

## 4.1 introduction

## 4.2 virtual circuit and datagram networks

## 4.3 what's inside a router

## 4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

## 4.5 routing algorithms

- link state
- distance vector
- hierarchical routing


## 4.6 routing in the Internet

- RIP
- OSPF
- BGP

## 4.7 broadcast and multicast routing

# Network layer

- ❖ Support upper layer: transport segment from sending to receiving host
- ❖ on sending side encapsulates segments into datagrams
- ❖ on receiving side, delivers segments to transport layer
- ❖ network layer protocols in *every* host, router
- ❖ router examines header fields in all IP datagrams passing through it

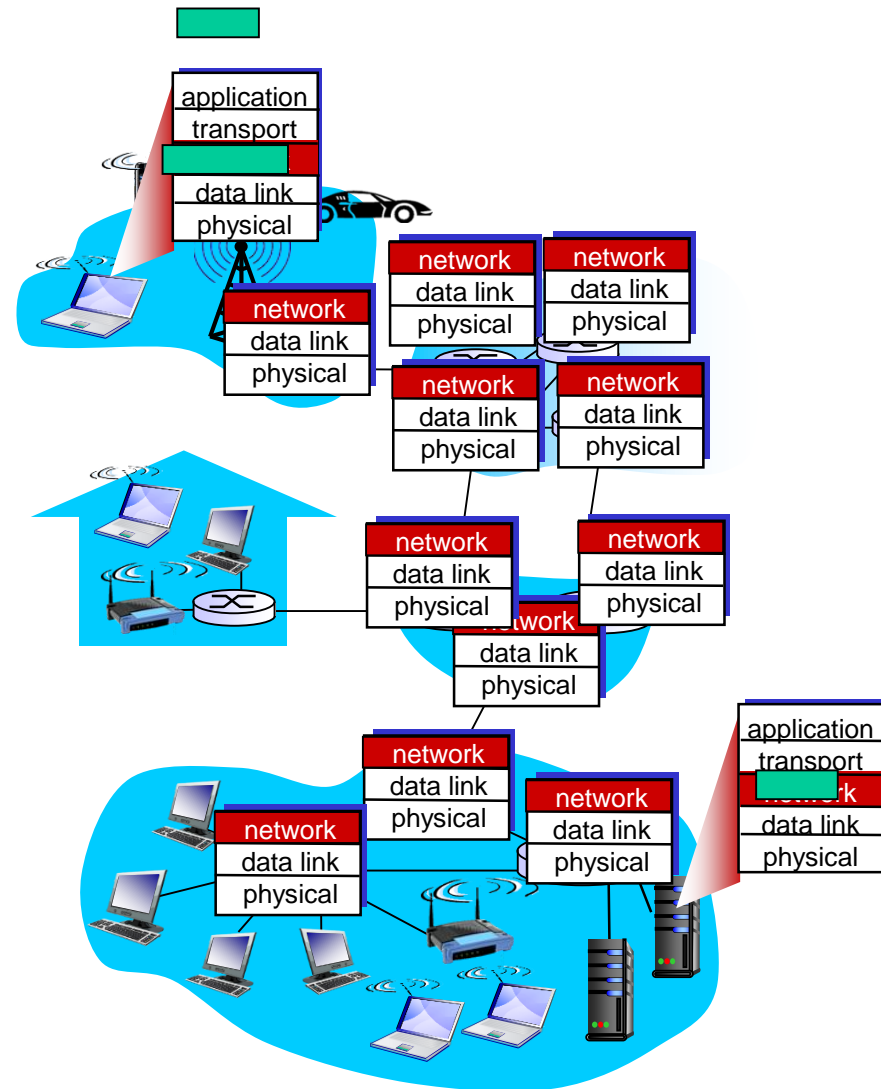

# Two key network-layer functions

❖ *forwarding*: move packets from router's input to appropriate router output

❖ *routing*: determine route taken by packets from source to dest.


- *routing algorithms*

*analogy*:

❖ *routing*: process of planning trip from source to dest

❖ *forwarding*: process of getting through single interchange

# Interplay between routing and forwarding

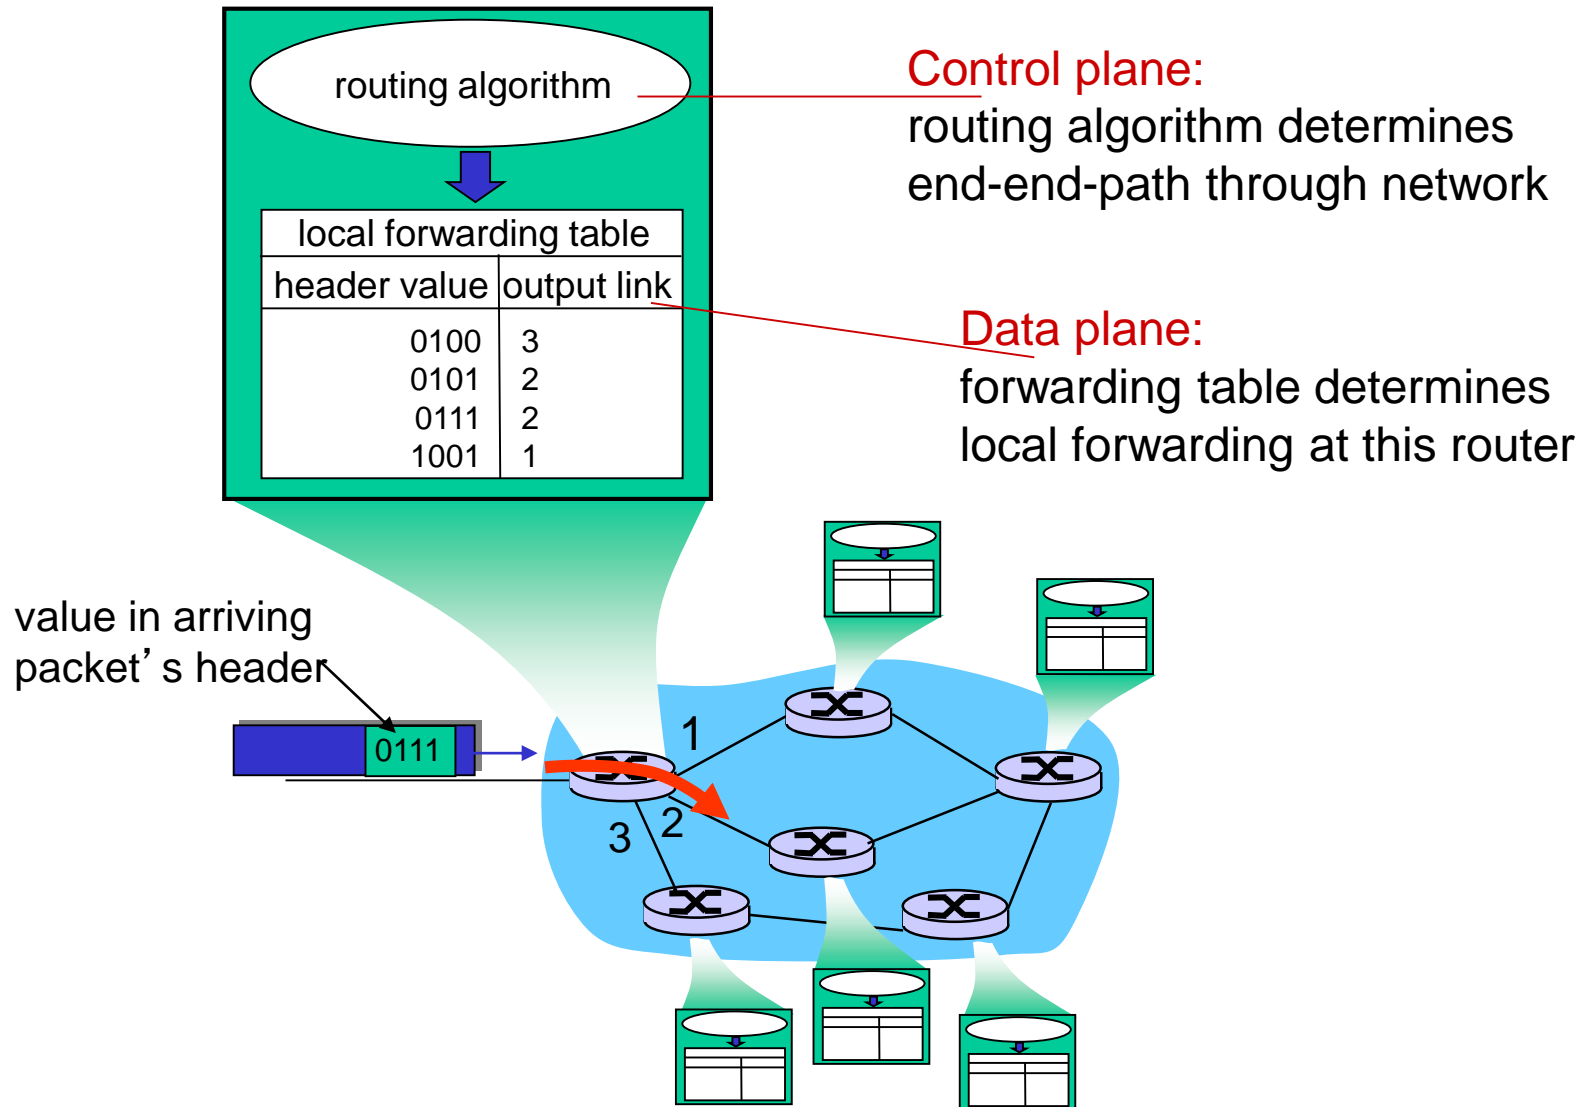

# Connection setup

- ❖ 3<sup>rd</sup> important function in *some* network architectures:
  - ATM, frame relay, X.25
- ❖ before datagrams flow, two end hosts *and* intervening routers establish virtual connection
  - routers get involved
- ❖ network vs transport layer **connection** service:
  - **network**: between two hosts (may also involve intervening routers in case of VCs)
  - **transport**: between two processes

# Network service model

*Q:* What *service model* for “channel” transporting datagrams from sender to receiver?

*example services for individual datagrams:*

- ❖ guaranteed delivery
- ❖ guaranteed delivery with less than 40 msec delay

*example services for a flow of datagrams:*

- ❖ in-order datagram delivery
- ❖ guaranteed minimum bandwidth to flow
- ❖ restrictions on changes in inter-packet spacing



# Network layer service models:

Network Architecture	Service Model	Guarantees ?				Congestion feedback
		Bandwidth	Loss	Order	Timing	
Internet	best effort	none	no	no	no	no (inferred via loss)
ATM	CBR	constant rate	yes	yes	yes	no congestion
ATM	VBR	guaranteed rate	yes	yes	yes	no congestion
ATM	ABR	guaranteed minimum	no	yes	no	yes
ATM	UBR	none	no	yes	no	no

ATM has various guarantees. Internet has almost none

# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

# Connection, connection-less service

- ❖ *datagram* network provides network-layer *connectionless* service
- ❖ *virtual-circuit* network provides network-layer *connection* service
- ❖ analogous to TCP/UDP connection-oriented / connectionless transport-layer services, but:
  - *service*: host-to-host
  - *no choice*: network provides one or the other
  - *implementation*: in network core

# Virtual circuits

“source-to-dest path behaves much like telephone circuit”

- performance-wise
- network actions along source-to-dest path

- ❖ call setup, teardown for each call *before* data can flow
- ❖ each packet carries VC identifier (not destination host address)
- ❖ every router on source-dest path maintains “state” for each passing connection
- ❖ link, router resources (bandwidth, buffers) may be *allocated* to VC (dedicated resources = predictable service)


# VC implementation

*a VC consists of:*

1. *path* from source to destination
  2. *VC numbers*, one number for each link along path
  3. *entries in forwarding tables* in routers along path
- ❖ packet belonging to VC carries VC number (rather than dest address)
  - ❖ VC number can be changed on each link.
    - new VC number comes from forwarding table

*VC is packet switching, not circuit switching!  
But it emulates circuit switching.*

# VC forwarding table

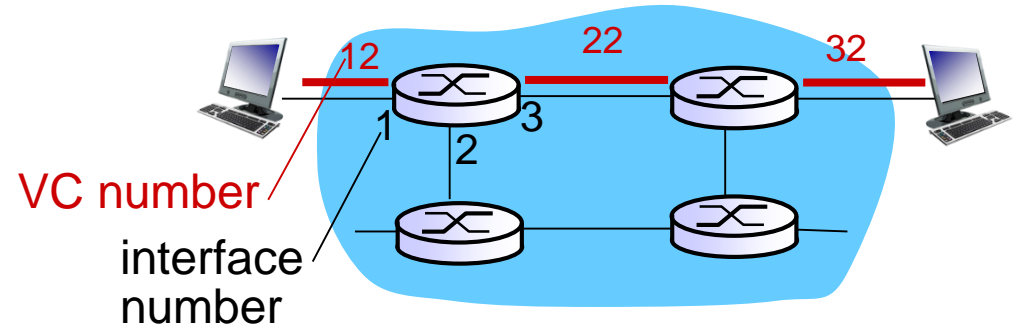


*forwarding table in  
northwest router:*

Incoming interface	Incoming VC #	Outgoing interface	Outgoing VC #
1	12	3	22
2	63	1	18
3	7	2	17
1	97	3	87
...	...	...	...

***VC routers maintain connection state information!***

# Virtual circuits: signaling protocols


- ❖ used to setup, maintain teardown VC
- ❖ used in ATM, frame-relay, X.25
- ❖ not used in today's Internet

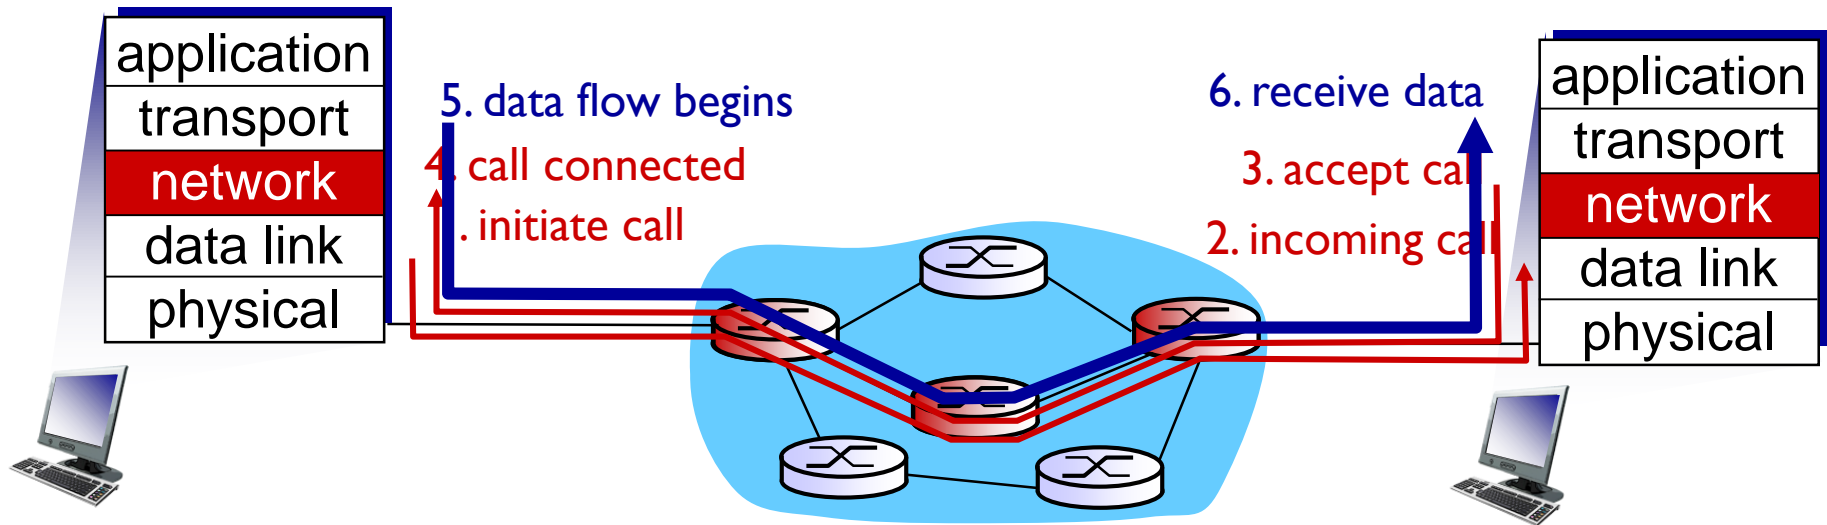

*A reserved lane on Highway 17!*

# Datagram networks


- ❖ no call setup at network layer
- ❖ routers: no state about end-to-end connections
  - no network-level concept of “connection”
- ❖ packets forwarded using destination host address

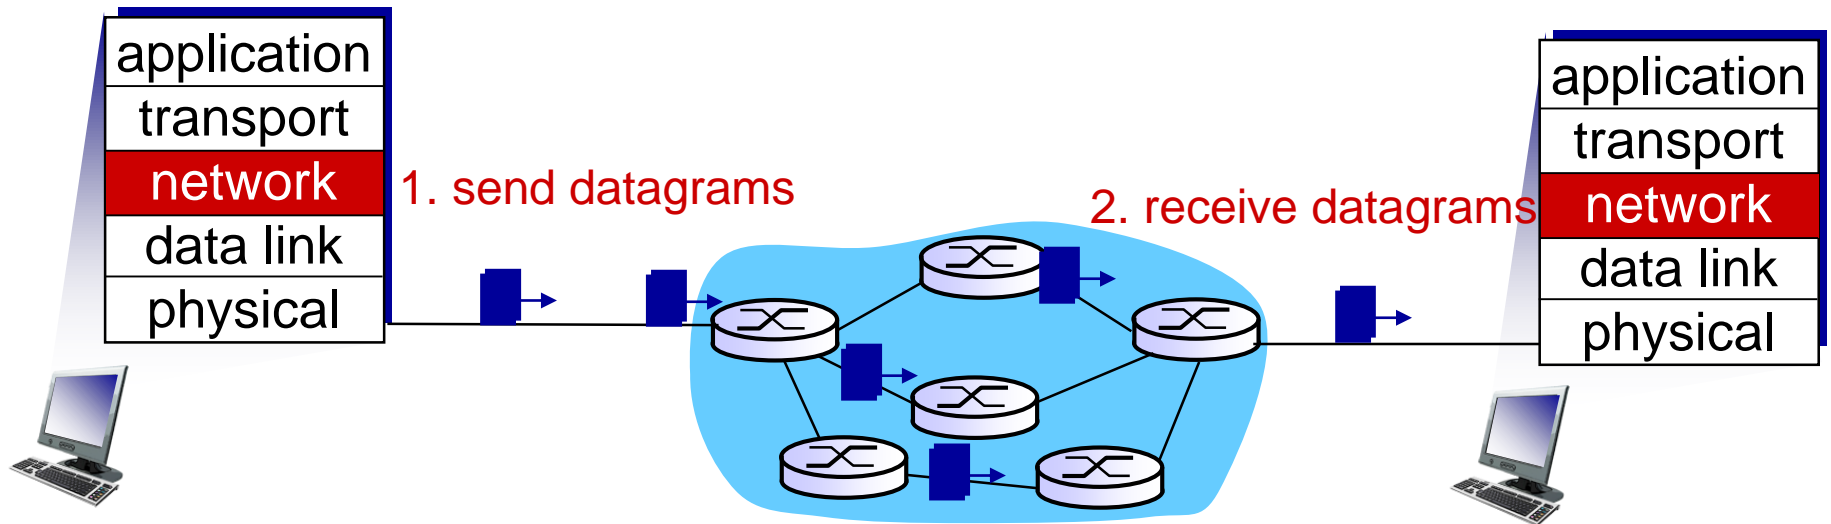

*We share lanes on Highway 17!*



# Datagram forwarding table

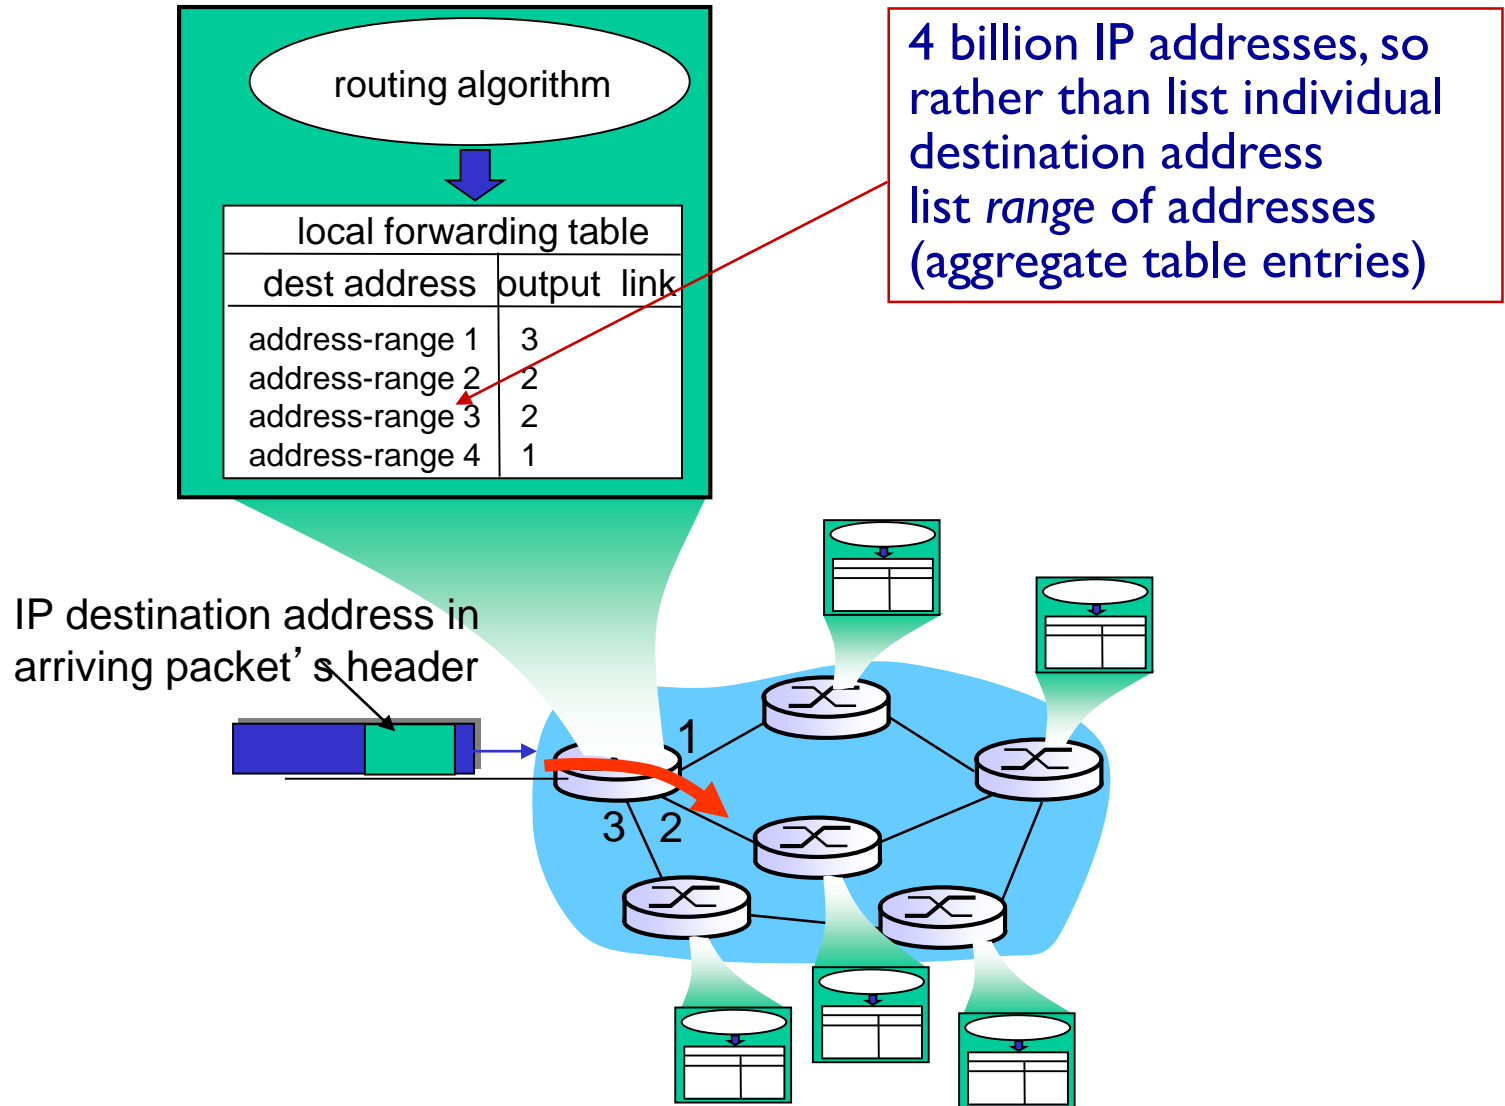

# Datagram forwarding table

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through 11001000 00010111 00010111 11111111	0
11001000 00010111 00011000 00000000 through 11001000 00010111 00011000 11111111	1
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

**Q:** but what happens if ranges don't divide up so nicely?

# Longest prefix matching

## *longest prefix matching*

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** *****	0
11001000 00010111 00011000 *****	1
11001000 00010111 00011*** *****	2
otherwise	3

examples:

DA: 11001000 00010111 00010110 10100001

which interface?

DA: 11001000 00010111 00011000 10101010

which interface?

# Datagram or VC network: why?

## *Internet (datagram)*

- ❖ data exchange among computers
  - “elastic” service, no strict timing req.
- ❖ many link types
  - different characteristics
  - uniform service difficult
- ❖ “smart” end systems (computers)
  - can adapt, perform control, error recovery
  - ***simple inside network, complexity at “edge”***

## *ATM (VC)*

- ❖ evolved from telephony
- ❖ human conversation:
  - strict timing, reliability requirements
  - need for guaranteed service
- ❖ “dumb” end systems
  - telephones
  - ***complexity inside network***

# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet


- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing


# Router architecture overview

two key router functions:

- ❖ run routing algorithms/protocol (RIP, OSPF, BGP)
- ❖ *forwarding* datagrams from incoming to outgoing link

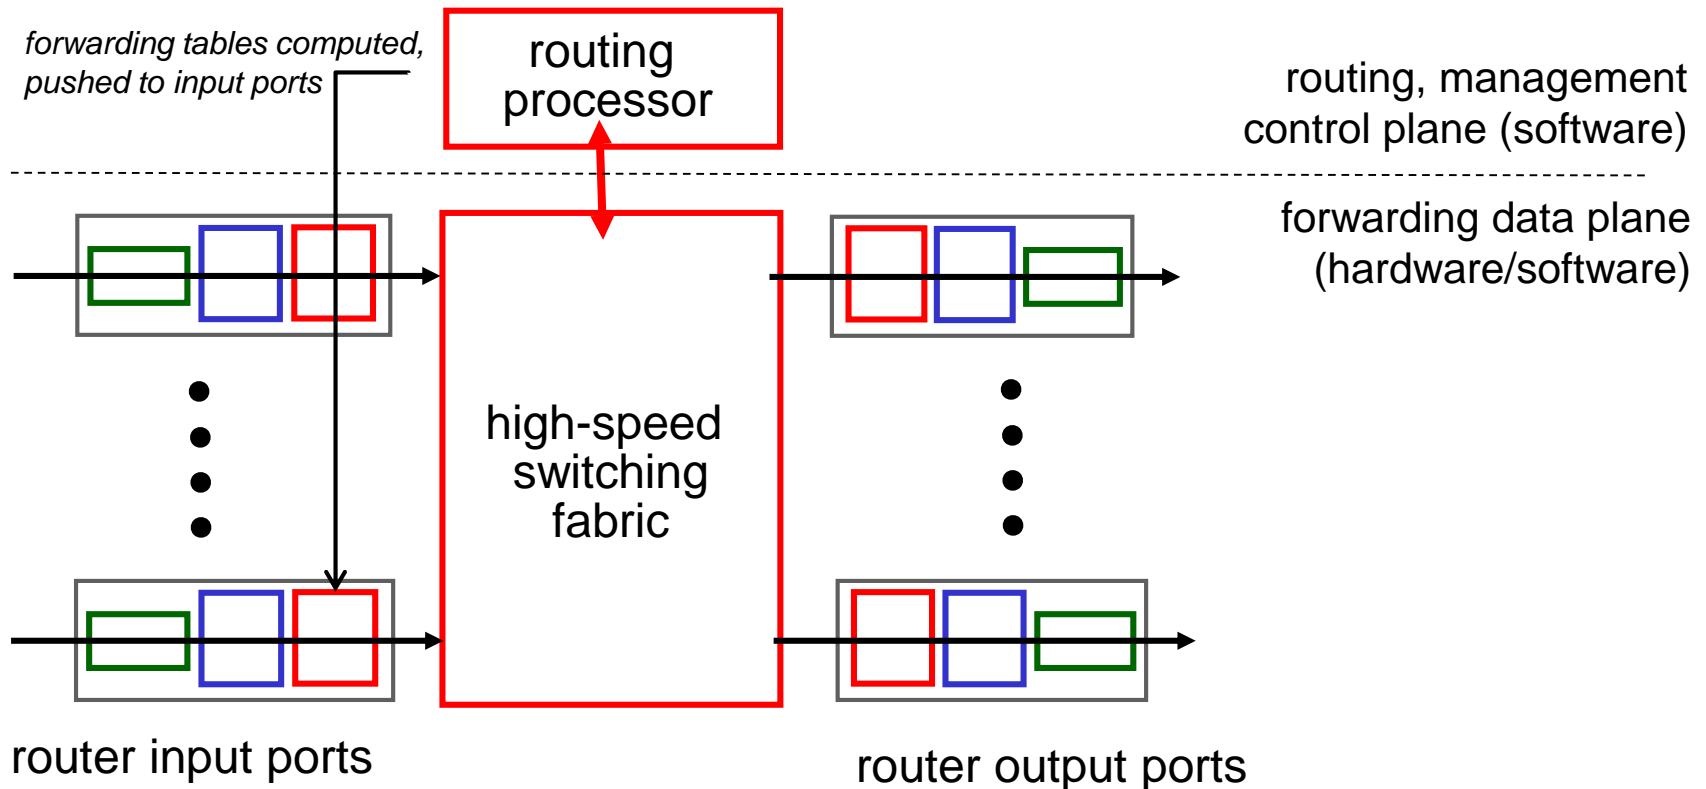

# Input port functions

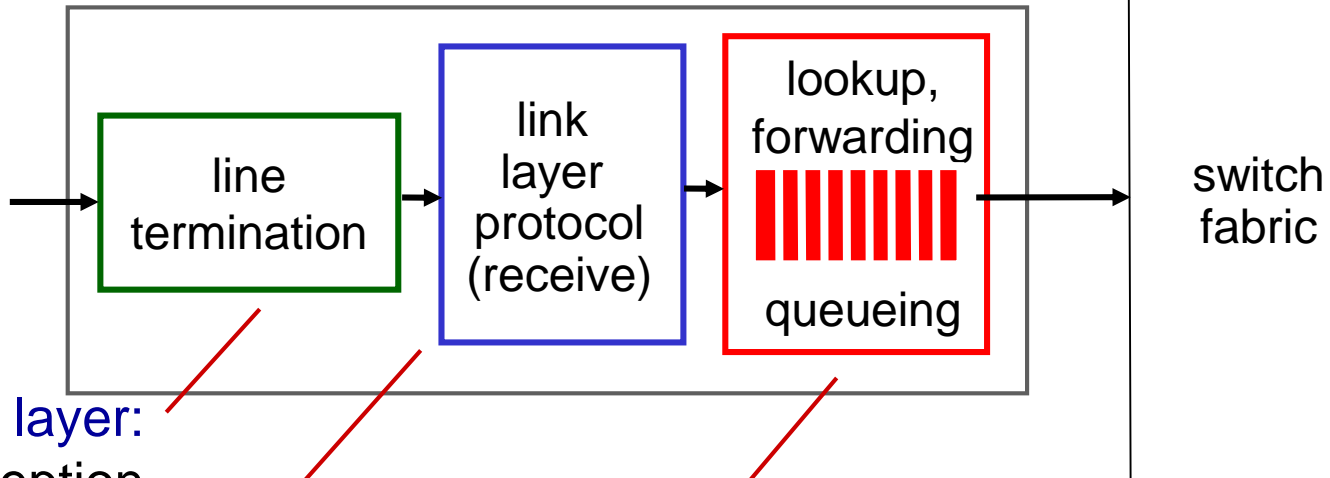

physical layer:  
bit-level reception


data link layer:  
e.g., Ethernet  
see chapter 5

## decentralized switching:

- ❖ given datagram dest., lookup output port using forwarding table in input port memory (“*match plus action*”)
- ❖ goal: complete input port processing at ‘line speed’
- ❖ queuing: if datagrams arrive faster than forwarding rate into switch fabric

# Switching fabrics

- ❖ transfer packet from input buffer to appropriate output buffer
- ❖ switching rate: rate at which packets can be transfer from inputs to outputs
  - often measured as multiple of input/output line rate
  - N inputs: switching rate N times line rate desirable
- ❖ three types of switching fabrics

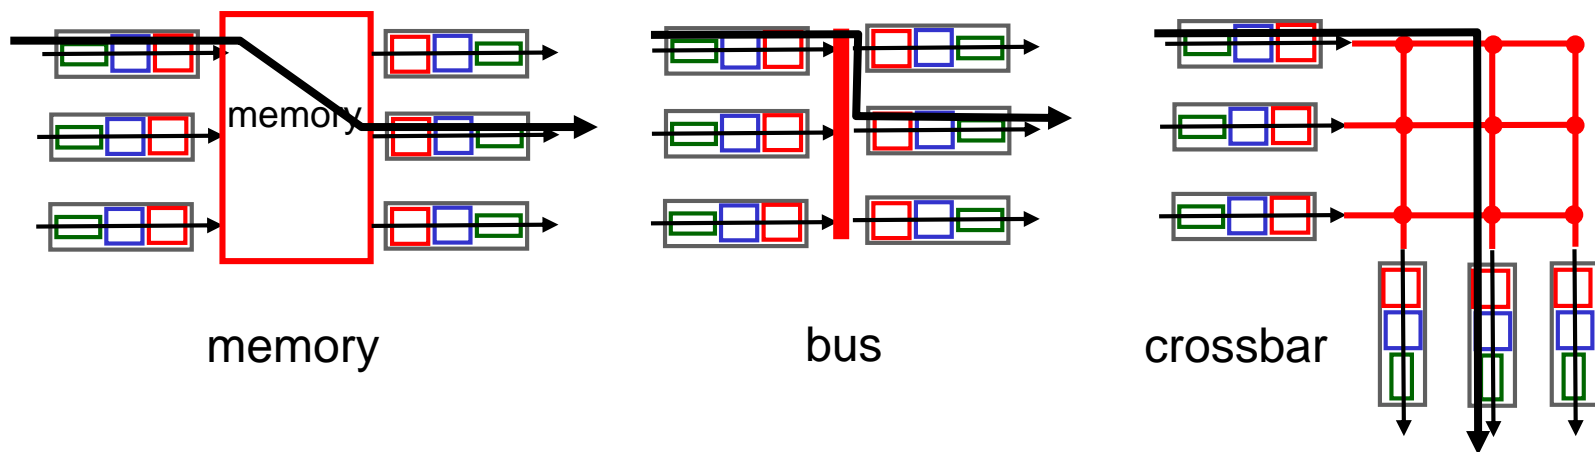




# Switching via memory


## *first generation routers:*

- ❖ traditional computers with switching under direct control of CPU
- ❖ packet copied to system's memory
- ❖ speed limited by memory bandwidth (2 bus crossings per datagram)

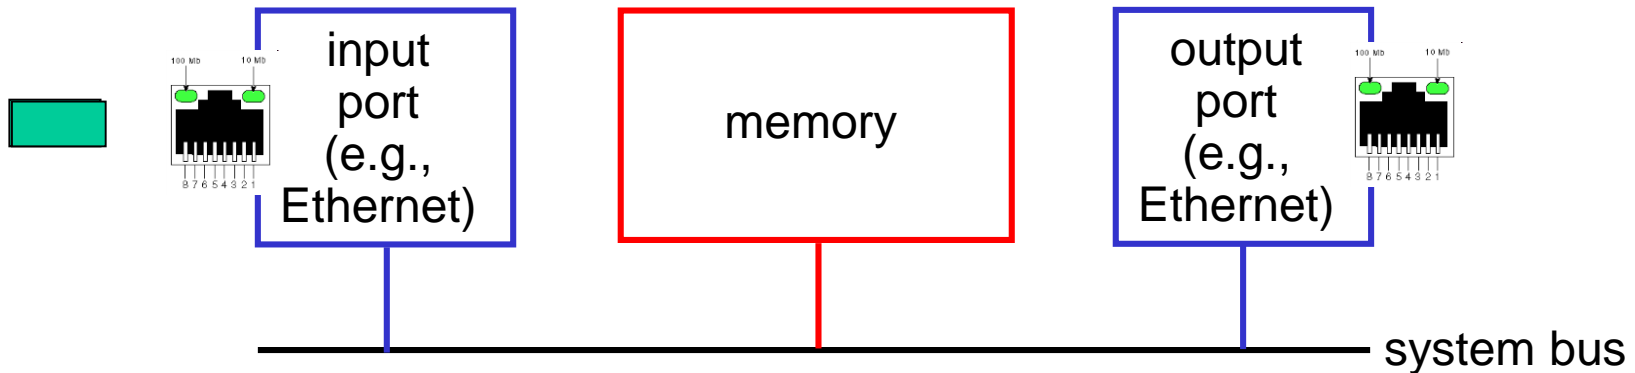


# Switching via a bus

- ❖ datagram from input port memory to output port memory via a shared bus
- ❖ *bus contention*: switching speed limited by bus bandwidth
- ❖ 32 Gbps bus, Cisco 5600: sufficient speed for access and enterprise routers

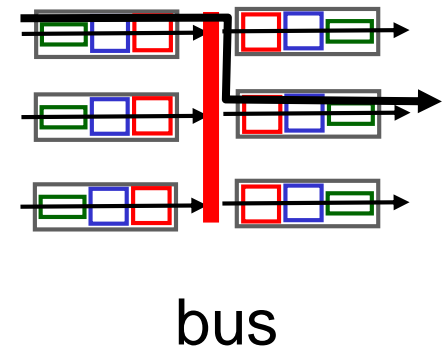


# Switching via interconnection network

- ❖ overcome bus bandwidth limitations
- ❖ **banyan networks, crossbar, other** interconnection nets initially developed to connect processors in multiprocessor
- ❖ Cisco I2000: switches 60 Gbps through the interconnection network

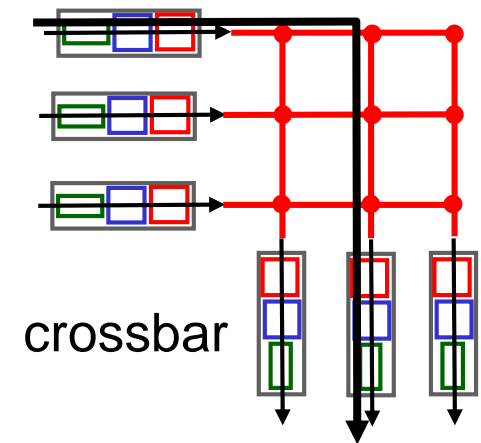


# Output ports

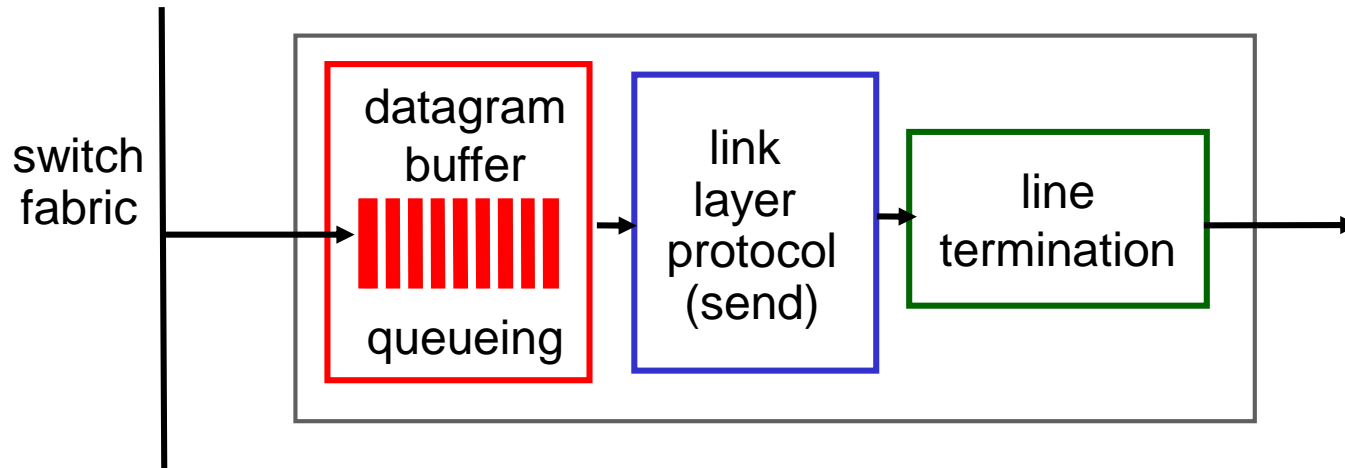


- ❖ *buffering* required when datagrams arrive from fabric faster than the transmission rate
- ❖ *scheduling discipline* chooses among queued datagrams for transmission

# Output port queueing

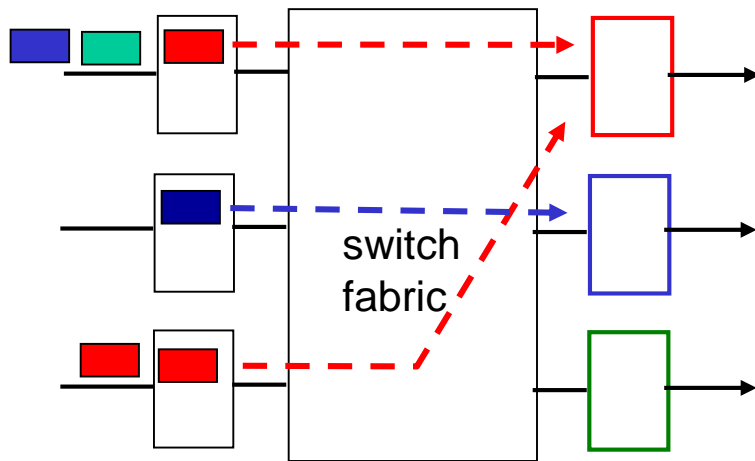

at  $t$ , packets move  
from input to output

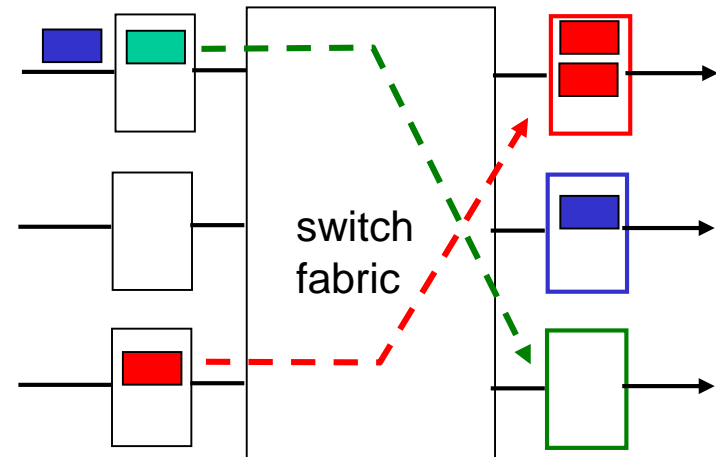

one packet time later

- ❖ buffering when arrival rate via switch exceeds output line speed
- ❖ *queueing (delay) and loss due to output port buffer overflow!*


# How much buffering?

- ❖ RFC 3439 rule of thumb: average buffering equal to “typical” RTT (say 250 msec) times link capacity  $C$ 
  - e.g.,  $C = 10$  Gpbs link: 2.5 Gbit buffer
- ❖ recent recommendation: with  $N$  flows, buffering equal to


$$\frac{RTT \cdot C}{\sqrt{N}}$$

# Input port queuing

- ❖ fabric slower than input ports combined -> queuing may occur at input queues
  - *queueing delay and loss due to input buffer overflow!*
- ❖ **Head-of-the-Line (HOL) blocking:** queued datagram at front of queue prevents others in queue from moving forward

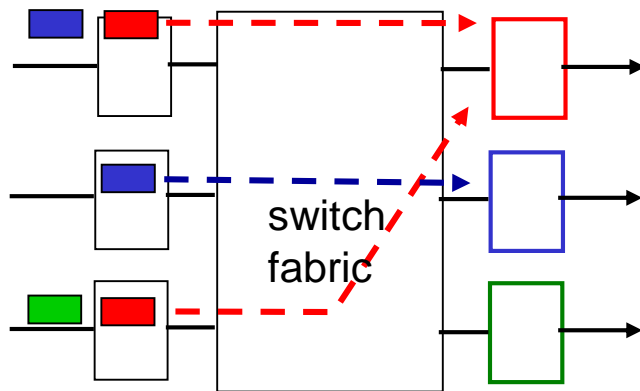

output port contention:  
only one red datagram can be  
transferred.  
*lower red packet is blocked*

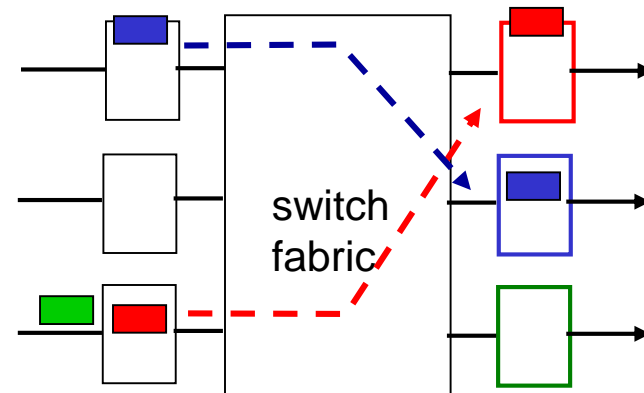

one packet time later:  
green packet  
experiences HOL  
blocking

# Next class

- ❖ Please read Chapter 4.3-4.4 of your textbook  
**BEFORE** Class