

# CMPE 150/L : Introduction to Computer Networks

Chen Qian

Computer Engineering  
UCSC Baskin Engineering

Lecture 13

# No Lecture next Tuesday

- ❑ No Lecture next Tuesday 2/28
- ❑ Instructor gone for presentation on a conference.
- ❑ Labs are still available

# Midterm grade by 3/1


- ❑ Grades uploaded to Canvas
- ❑ You may go to any lab session 3/1-3/7 to view your exam papers, but you are not allowed to keep them

# NAT: network address translation

NAT translation table	
WAN side addr	LAN side addr
138.76.29.7, 5001	10.0.0.1, 3345
.....	.....

**2:** NAT router changes datagram source addr from 10.0.0.1, 3345 to 138.76.29.7, 5001, updates table

**1:** host 10.0.0.1 sends datagram to 128.119.40.186, 80

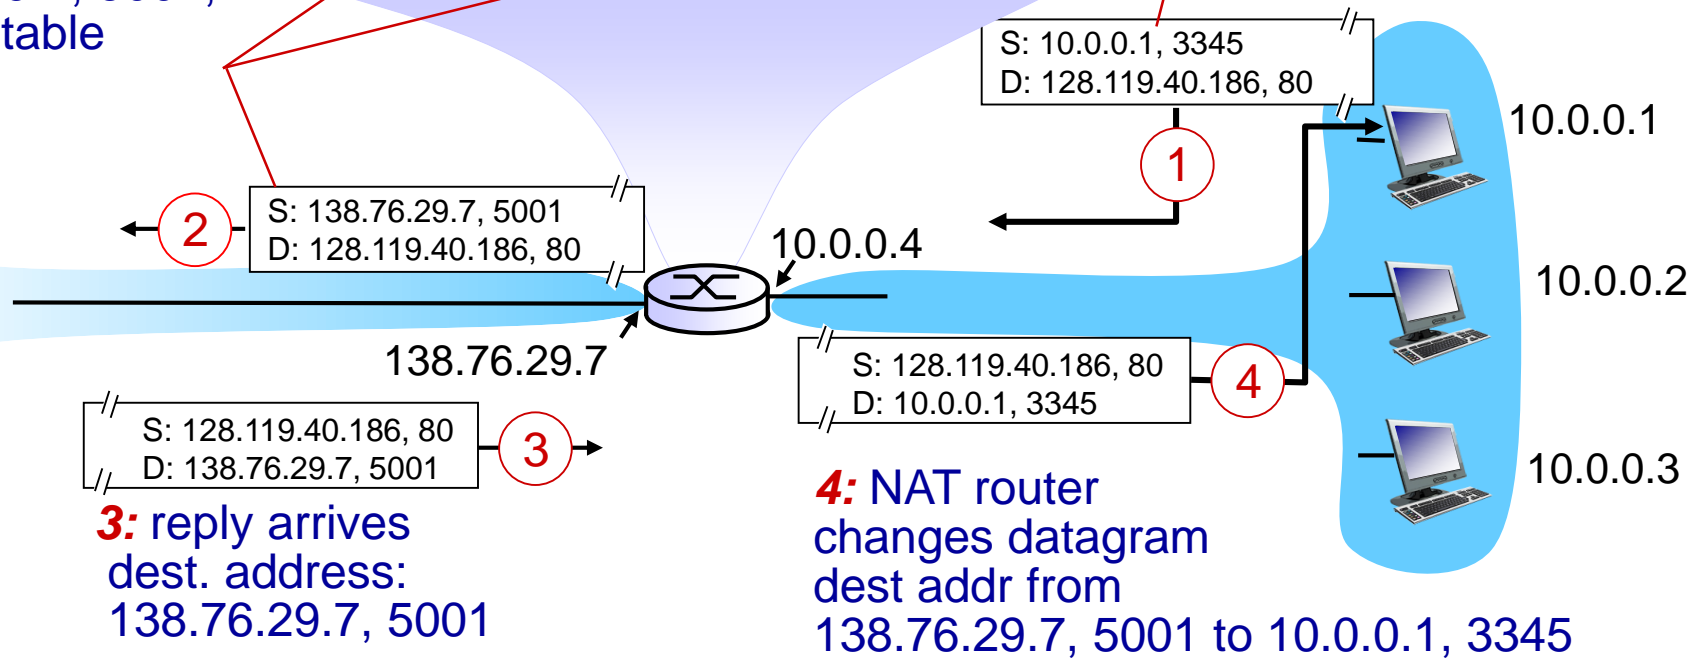


# NAT: network address translation

- ❖ 16-bit port-number field:
  - 60,000 simultaneous connections with a single LAN-side address!
- ❖ NAT is controversial:
  - routers should only process up to layer 3
  - violates end-to-end argument
    - NAT possibility must be taken into account by app designers, e.g., P2P applications
  - address shortage should instead be solved by IPv6

# NAT traversal problem

- ❖ client wants to connect to server with address 10.0.0.1
  - server address 10.0.0.1 local to LAN (client can't use it as destination addr)
  - only one externally visible NATed address: 138.76.29.7
- ❖ **solution 1:** statically configure NAT to forward incoming connection requests at given port to server
  - e.g., (138.76.29.7, port 2500) always forwarded to 10.0.0.1 port 25000

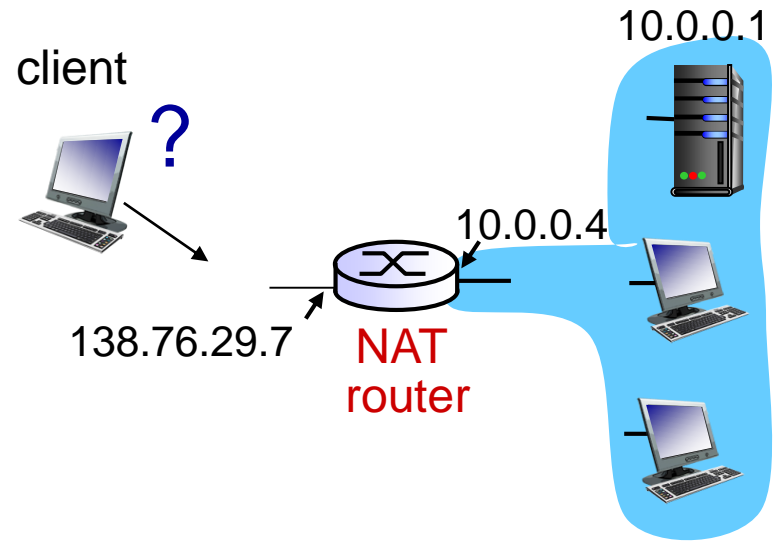


# NAT traversal problem

❖ **solution 2:** Universal Plug and Play (UPnP) Internet Gateway Device (IGD) Protocol. Allows NATed host to:


- ❖ learn public IP address (138.76.29.7)
- ❖ add/remove port mappings (with lease times)

i.e., automate static NAT port map configuration

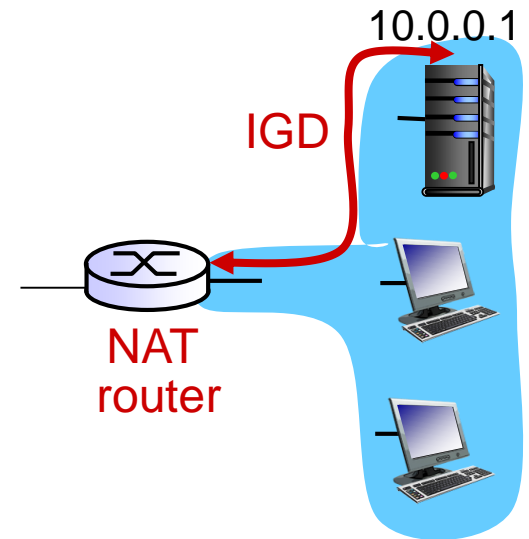

# NAT traversal problem

- ❖ **solution 3:** relaying (used in Skype)
  - NATed client establishes connection to relay
  - external client connects to relay
  - relay bridges packets between to connections

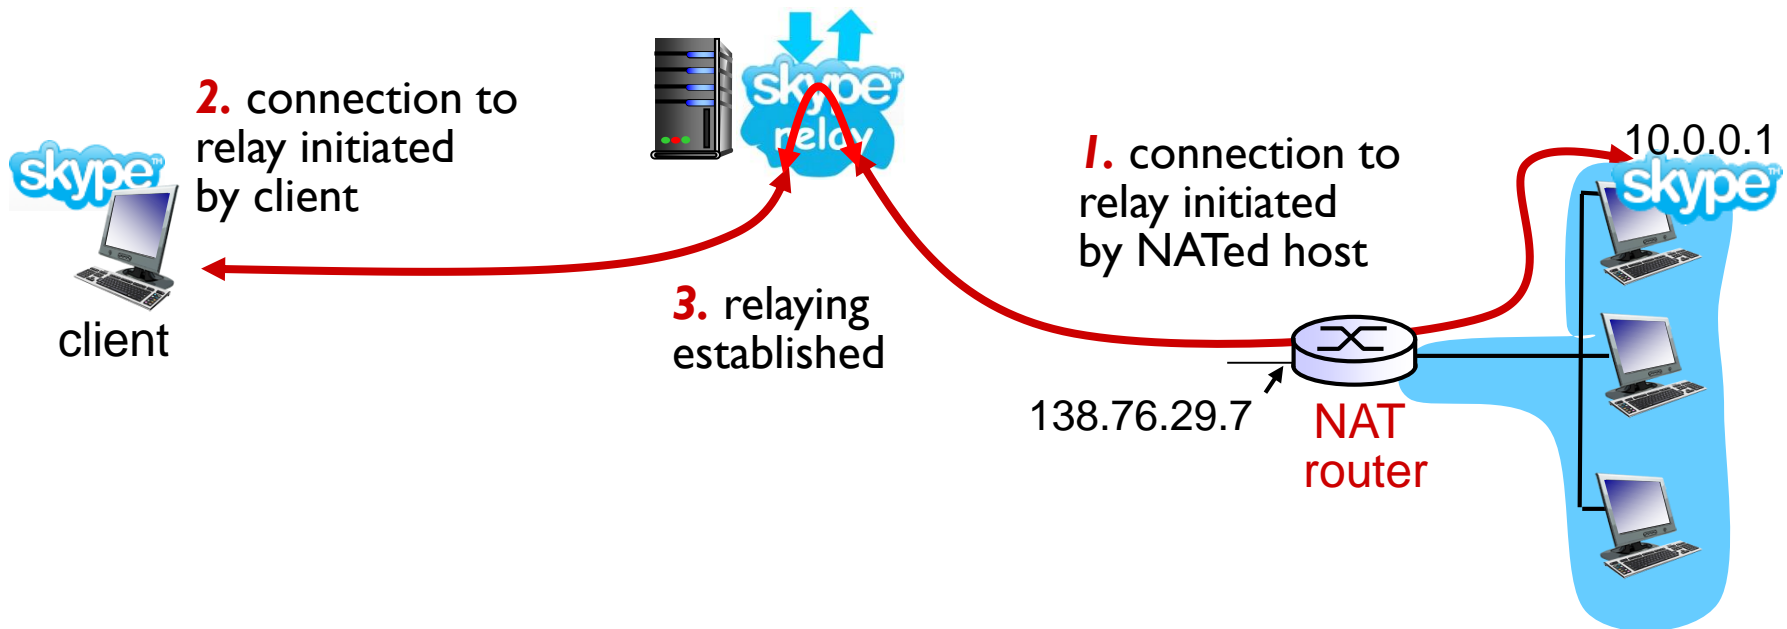



# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

# ICMP: internet control message protocol

- ❖ used by hosts & routers to communicate network-level information

- error reporting: unreachable host, network, port, protocol
- echo request/reply (used by ping)

- ❖ network-layer “above” IP:


- ICMP msgs carried in IP datagrams

- ❖ **ICMP message:** type, code plus first 8 bytes of IP datagram causing error

<u>Type</u>	<u>Code</u>	<u>description</u>
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

# Traceroute and ICMP

- ❖ source sends series of UDP segments to dest
    - first set has TTL = 1
    - second set has TTL=2, etc.
    - unlikely port number
  - ❖ when  $n$ th set of datagrams arrives to  $n$ th router:
    - router discards datagrams
    - and sends source ICMP messages (type 11, code 0)
    - ICMP messages includes name of router & IP address
  - ❖ when ICMP messages arrives, source records RTTs
- stopping criteria:*
- ❖ UDP segment eventually arrives at destination host
  - ❖ destination returns ICMP “port unreachable” message (type 3, code 3)
  - ❖ source stops

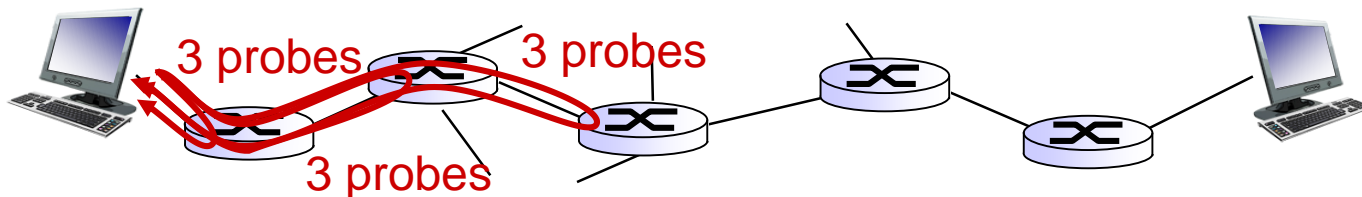

# IPv6: motivation

- ❖ *initial motivation*: 32-bit address space soon to be completely allocated.
- ❖ additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

## *IPv6 datagram format:*

- fixed-length 40 byte header
- no fragmentation allowed


# IPv6 datagram format

*priority*: identify priority among datagrams in flow

*flow Label*: identify datagrams in same “flow.”

(concept of “flow” not well defined).

*next header*: identify upper layer protocol for data

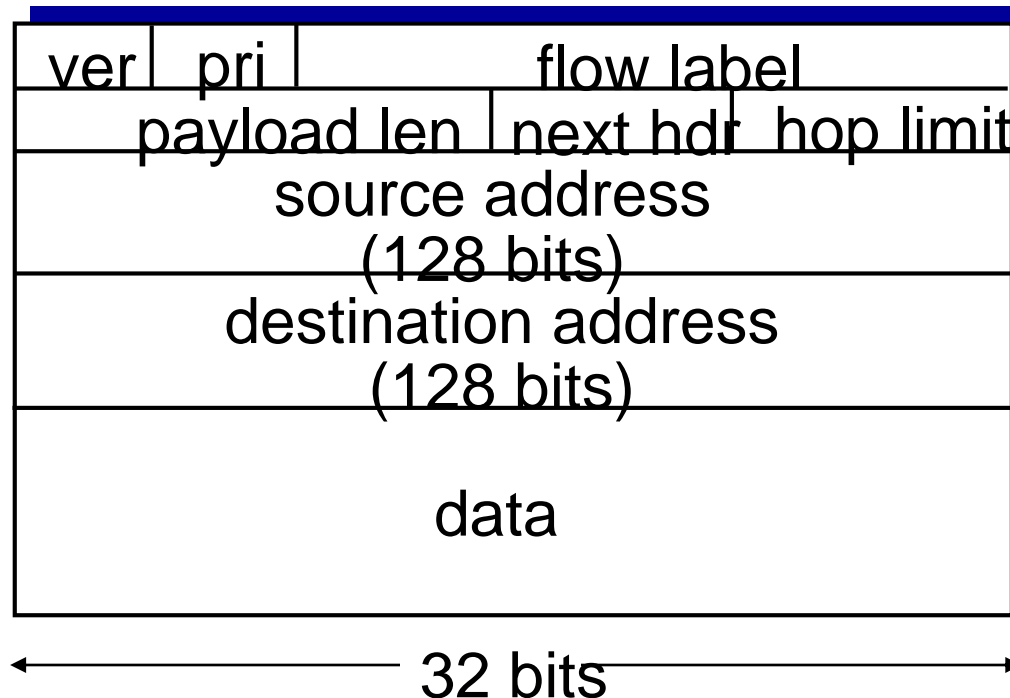


# Other changes from IPv4



- ❖ *checksum*: removed entirely to reduce processing time at each hop
- ❖ *options*: allowed, but outside of header, indicated by “Next Header” field
- ❖ *ICMPv6*: new version of ICMP
  - additional message types, e.g. “Packet Too Big”
  - multicast group management functions

# Transition from IPv4 to IPv6

- ❖ not all routers can be upgraded simultaneously
  - no “flag days”
  - how will network operate with mixed IPv4 and IPv6 routers?
- ❖ **tunneling**: IPv6 datagram carried as *payload* in IPv4 datagram among IPv4 routers



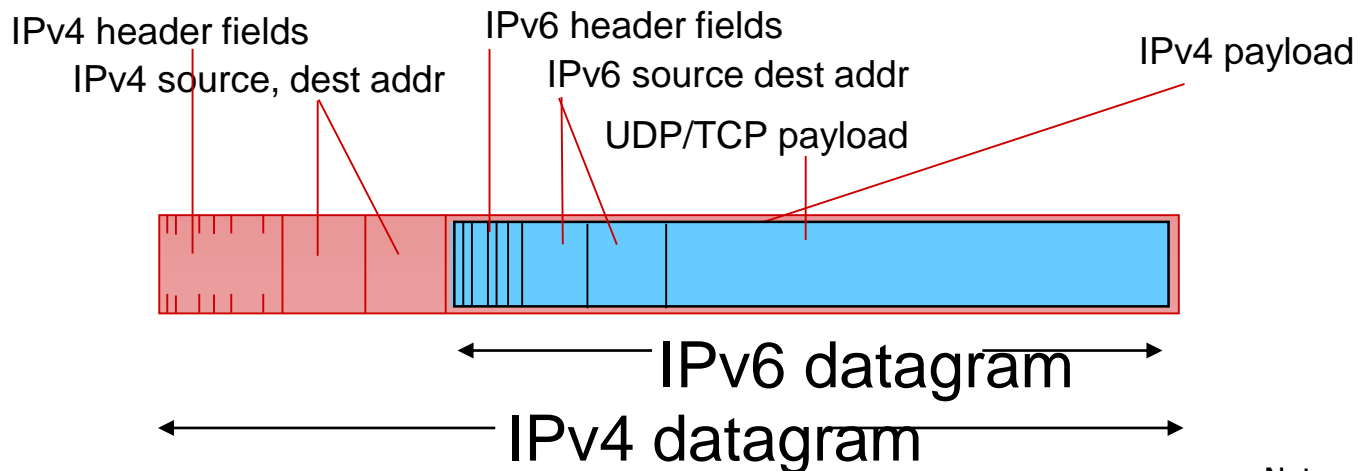


# Tunneling

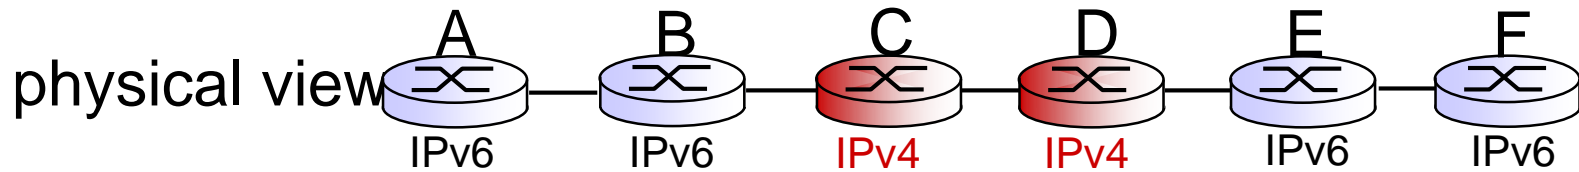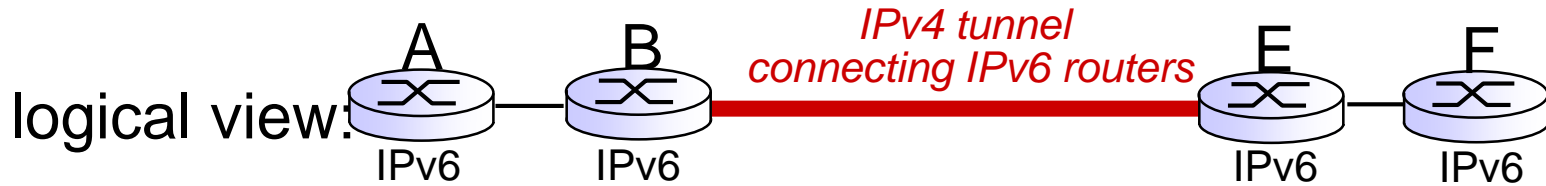



# Tunneling

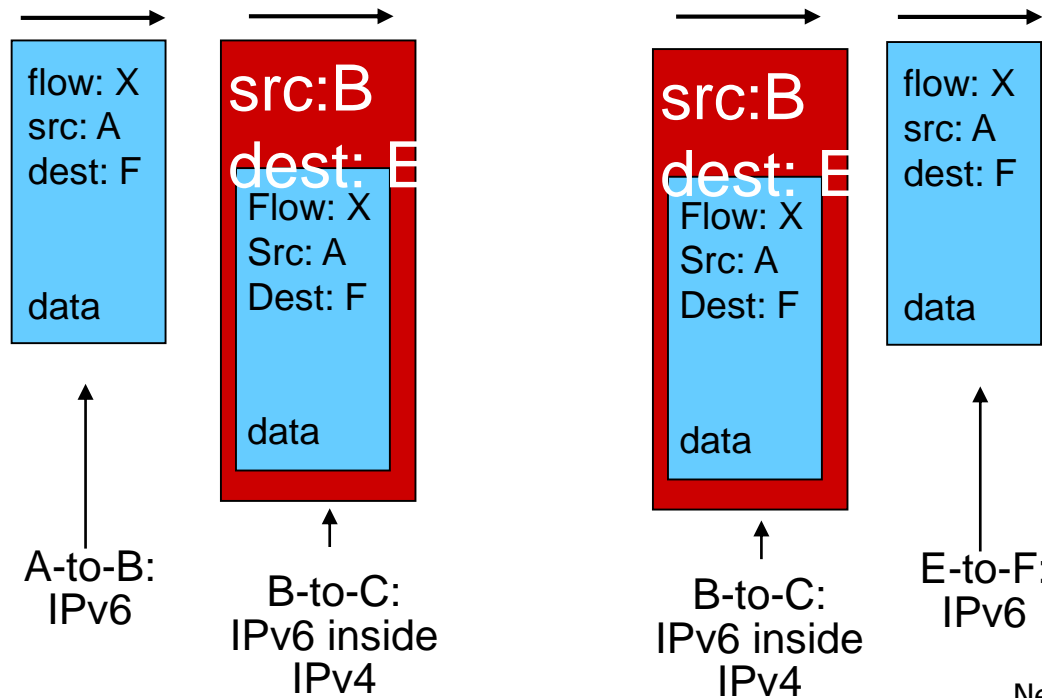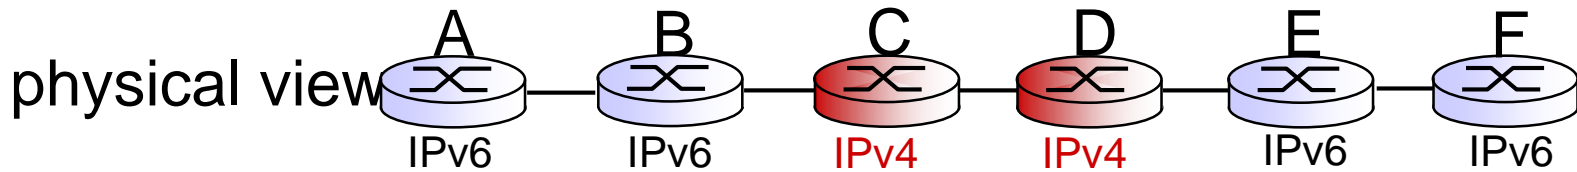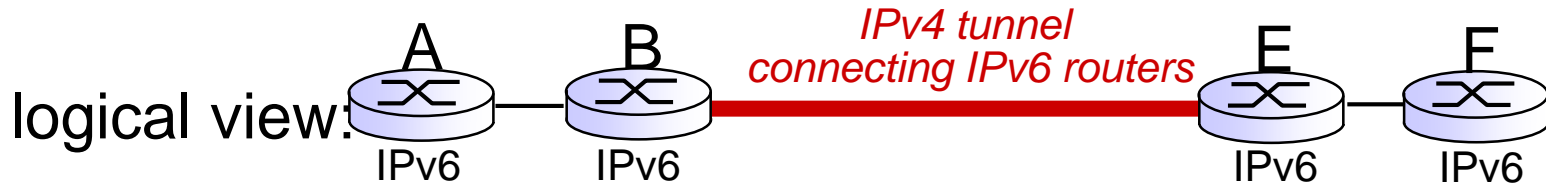

# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms


- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP


4.7 broadcast and multicast routing

# Interplay between routing, forwarding

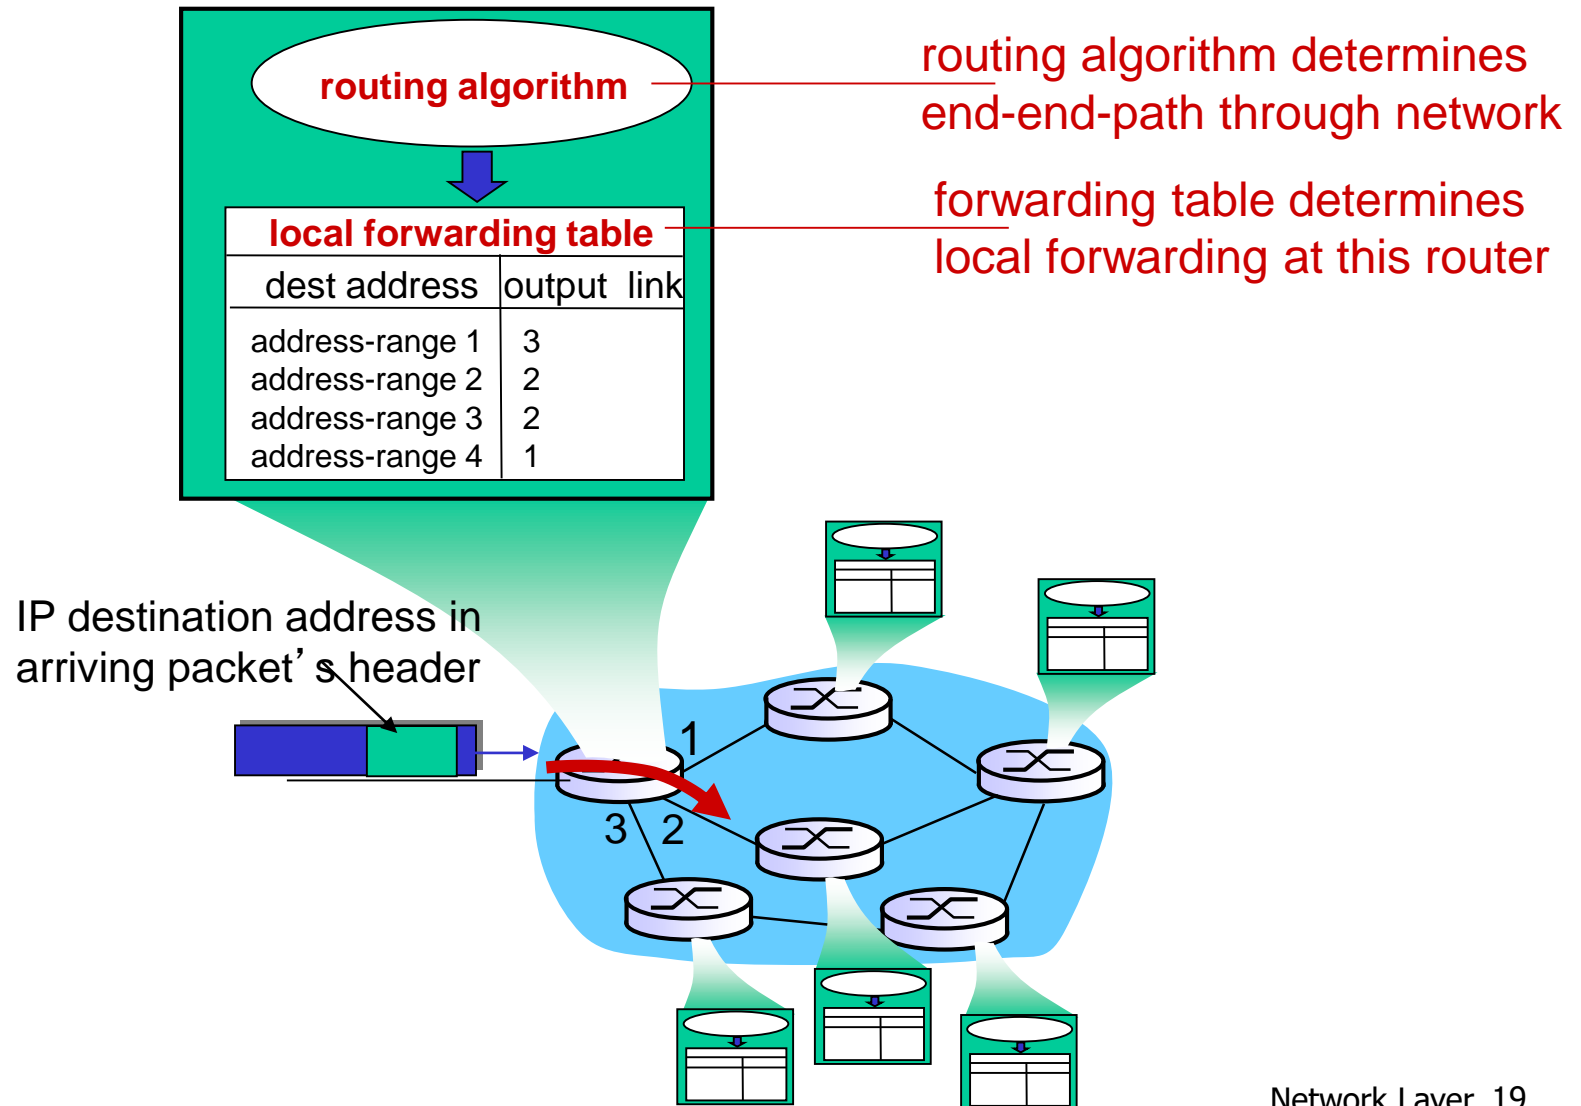

# Traditional Computer Networks


**Data plane:**  
**Packet  
streaming**

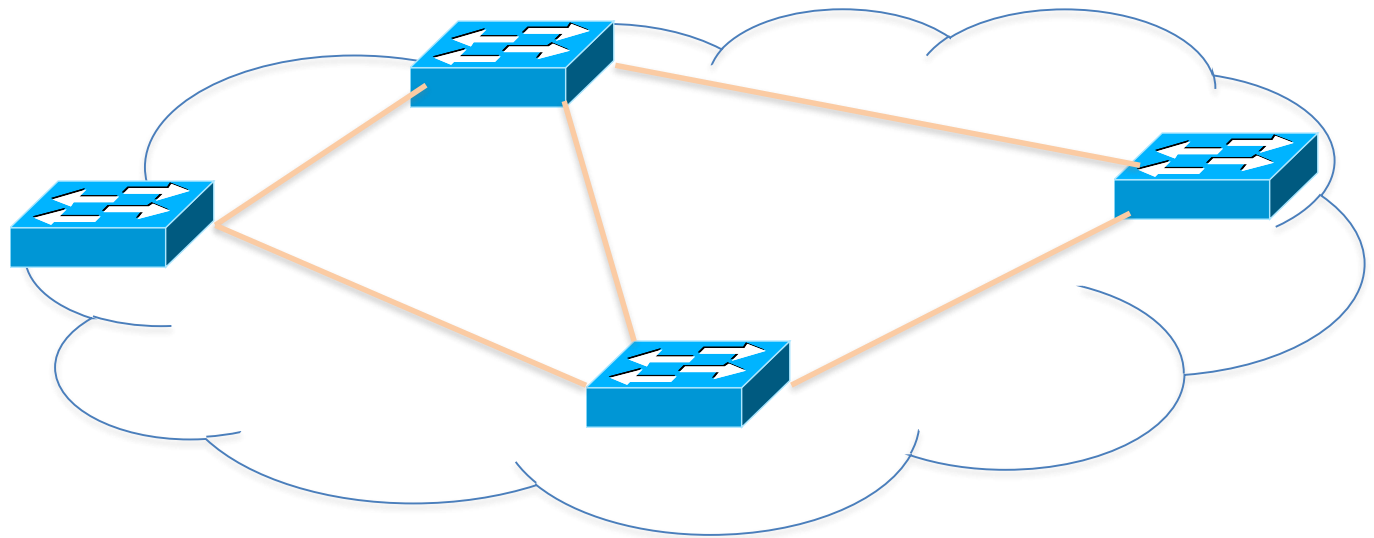

**Forward, filter, buffer, mark,  
rate-limit, and measure packets**

# Traditional Computer Networks


**Control plane:**  
**Distributed algorithms**

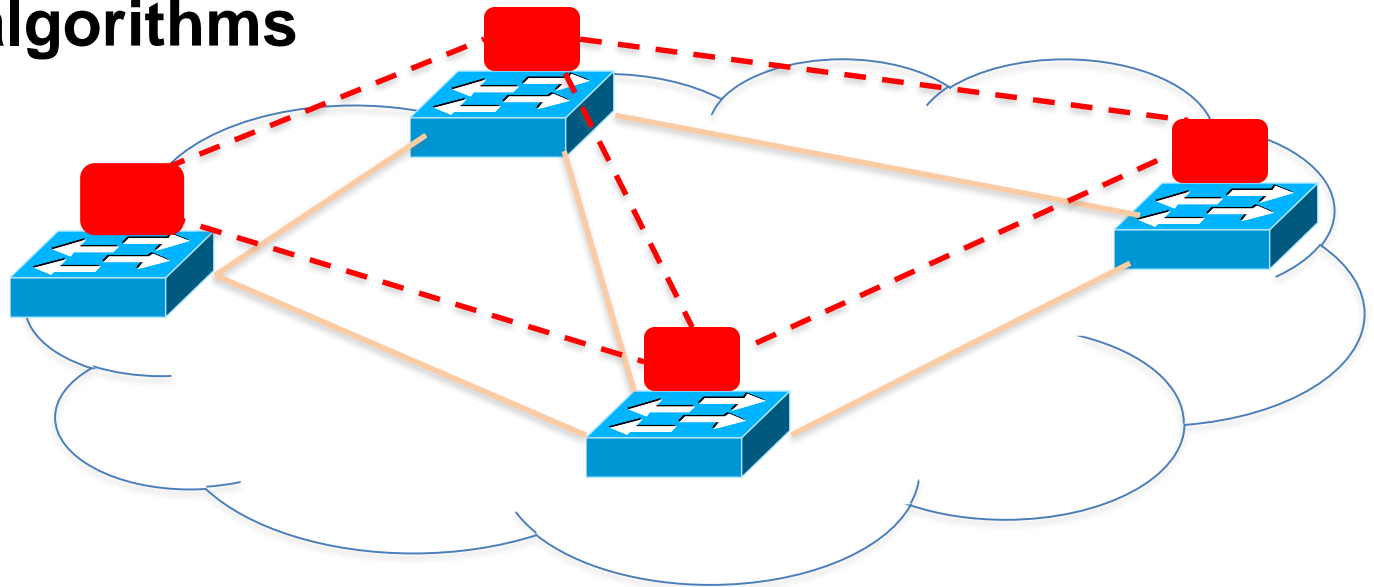

**Track topology changes, compute routes, install forwarding rules**


# Traditional Computer Networks

**Management plane:**  
**Human time scale**

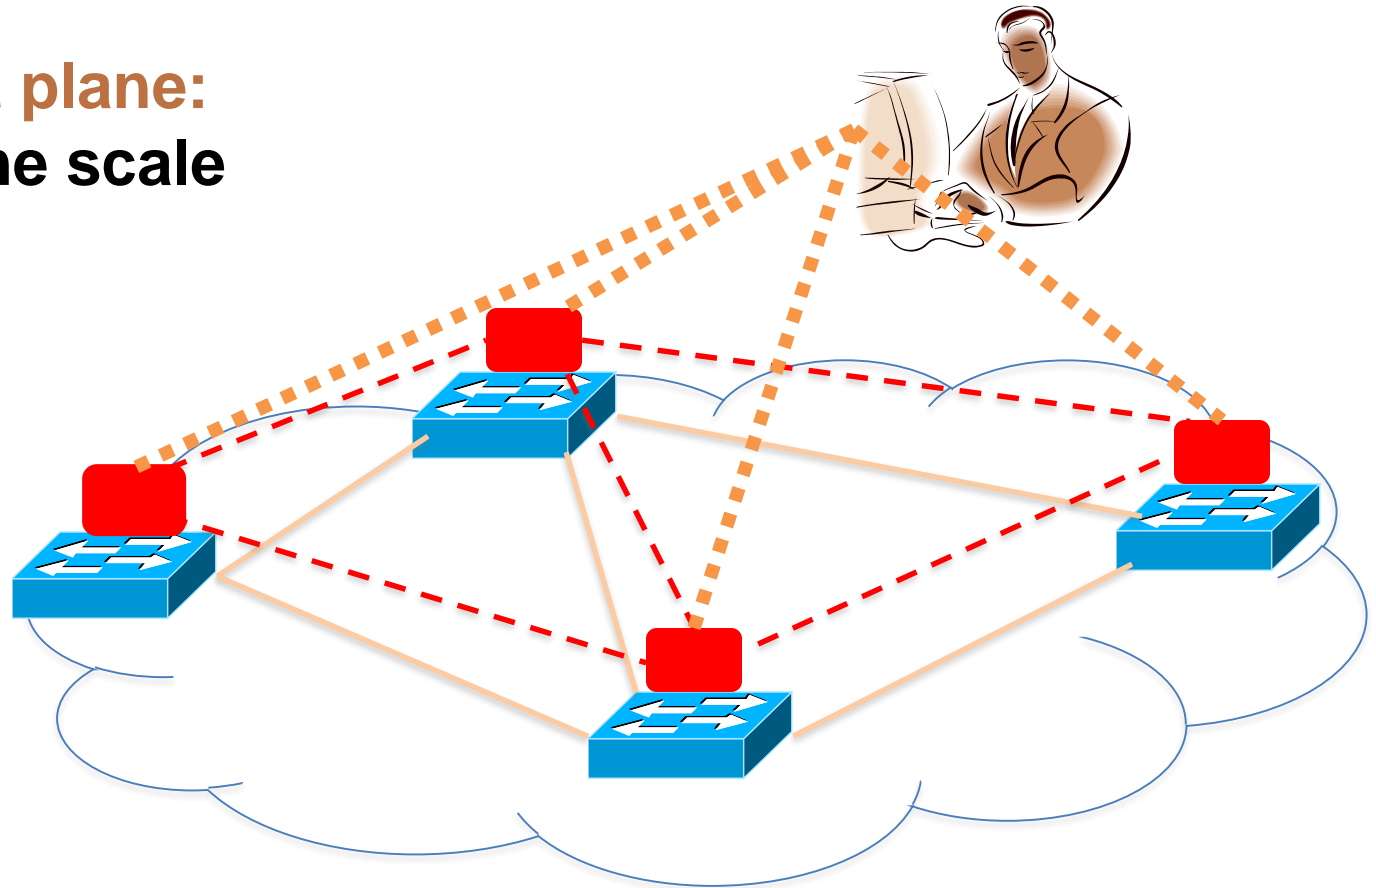

**Collect measurements and  
configure the equipment**

# Software Defined Networking (SDN)

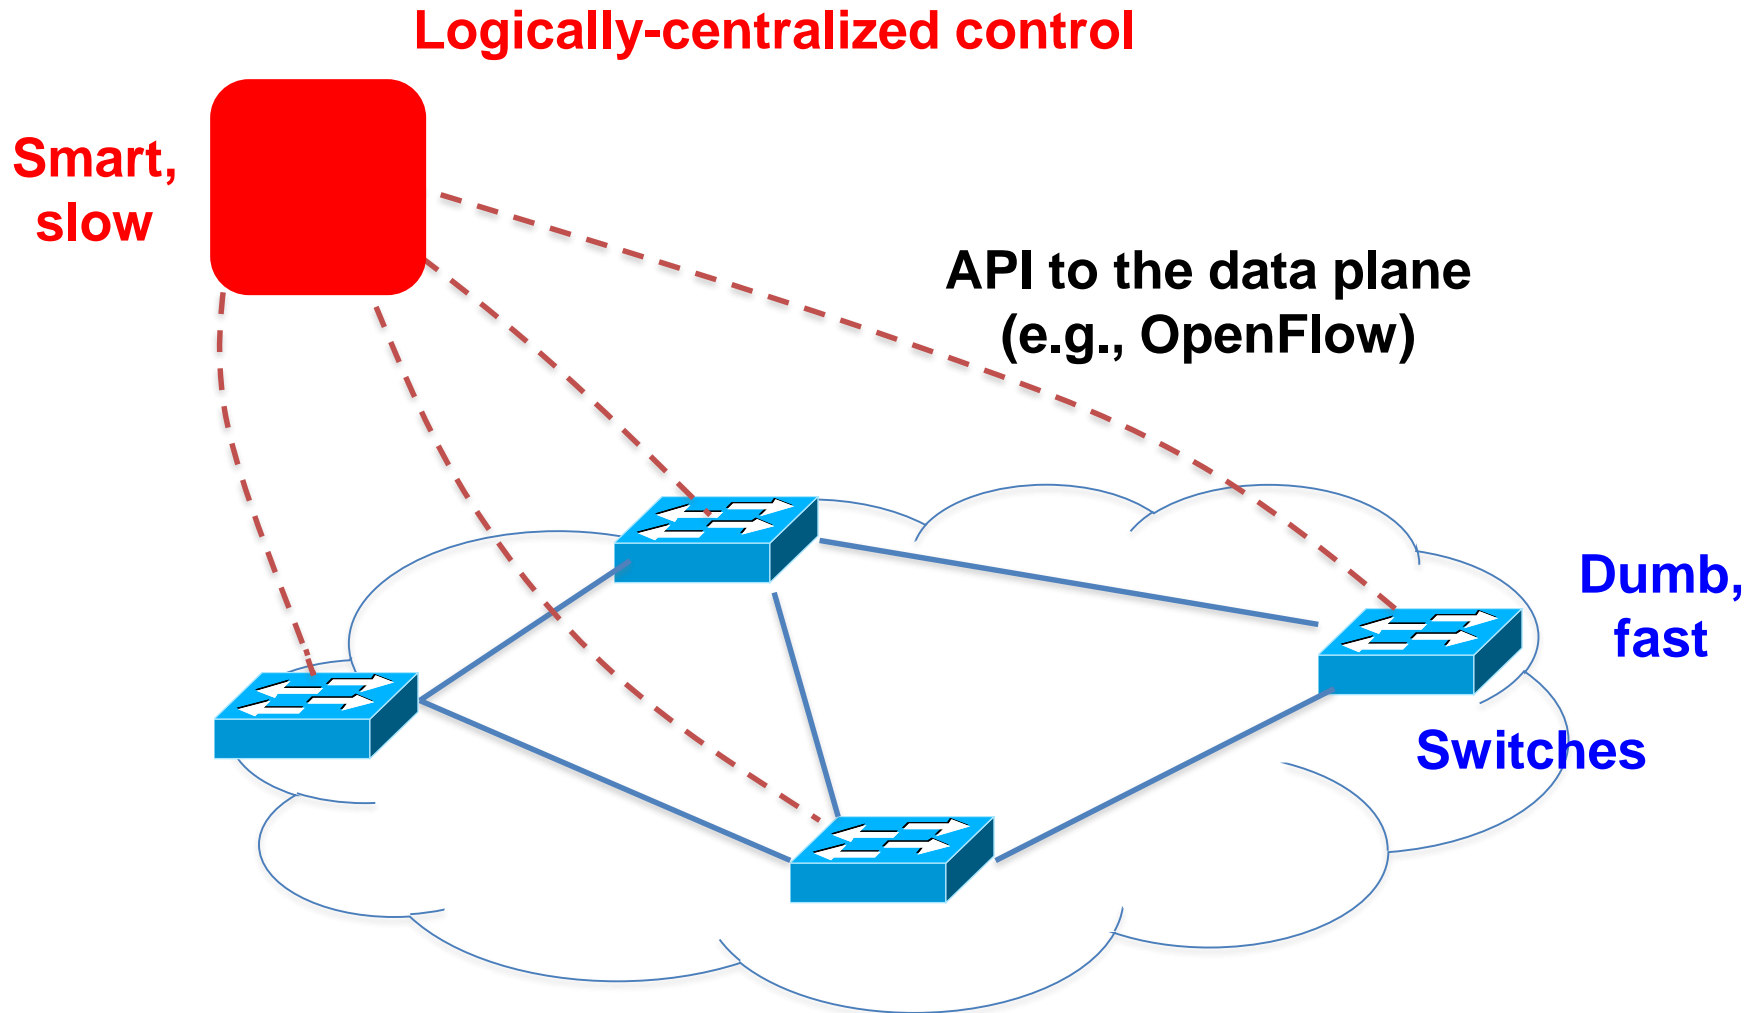

# OpenFlow Networks



# Data-Plane: Simple Packet Handling

- Simple packet-handling rules



- Pattern: match packet header bits
- Actions: drop, forward, modify, send to controller
- Priority: disambiguate overlapping patterns
- Counters: #bytes and #packets




1. `src=1.2.*.*`, `dest=3.4.5.*` → drop
2. `src = *.*.*.*`, `dest=3.4.*.*` → forward(2)
3. `src=10.1.2.3`, `dest=*.*.*.*` → send to controller

# Unifies Different Kinds of Boxes


- **Router**
  - Match: longest destination IP prefix
  - Action: forward out a link
- **Switch**
  - Match: destination MAC address
  - Action: forward or flood
- **Firewall**
  - Match: IP addresses and TCP/UDP port numbers
  - Action: permit or deny
- **NAT**
  - Match: IP address and port
  - Action: rewrite address and port

# E.g.: Dynamic Access Control


- Inspect first packet of a connection
- Consult the access control policy
- Install rules to block or route traffic

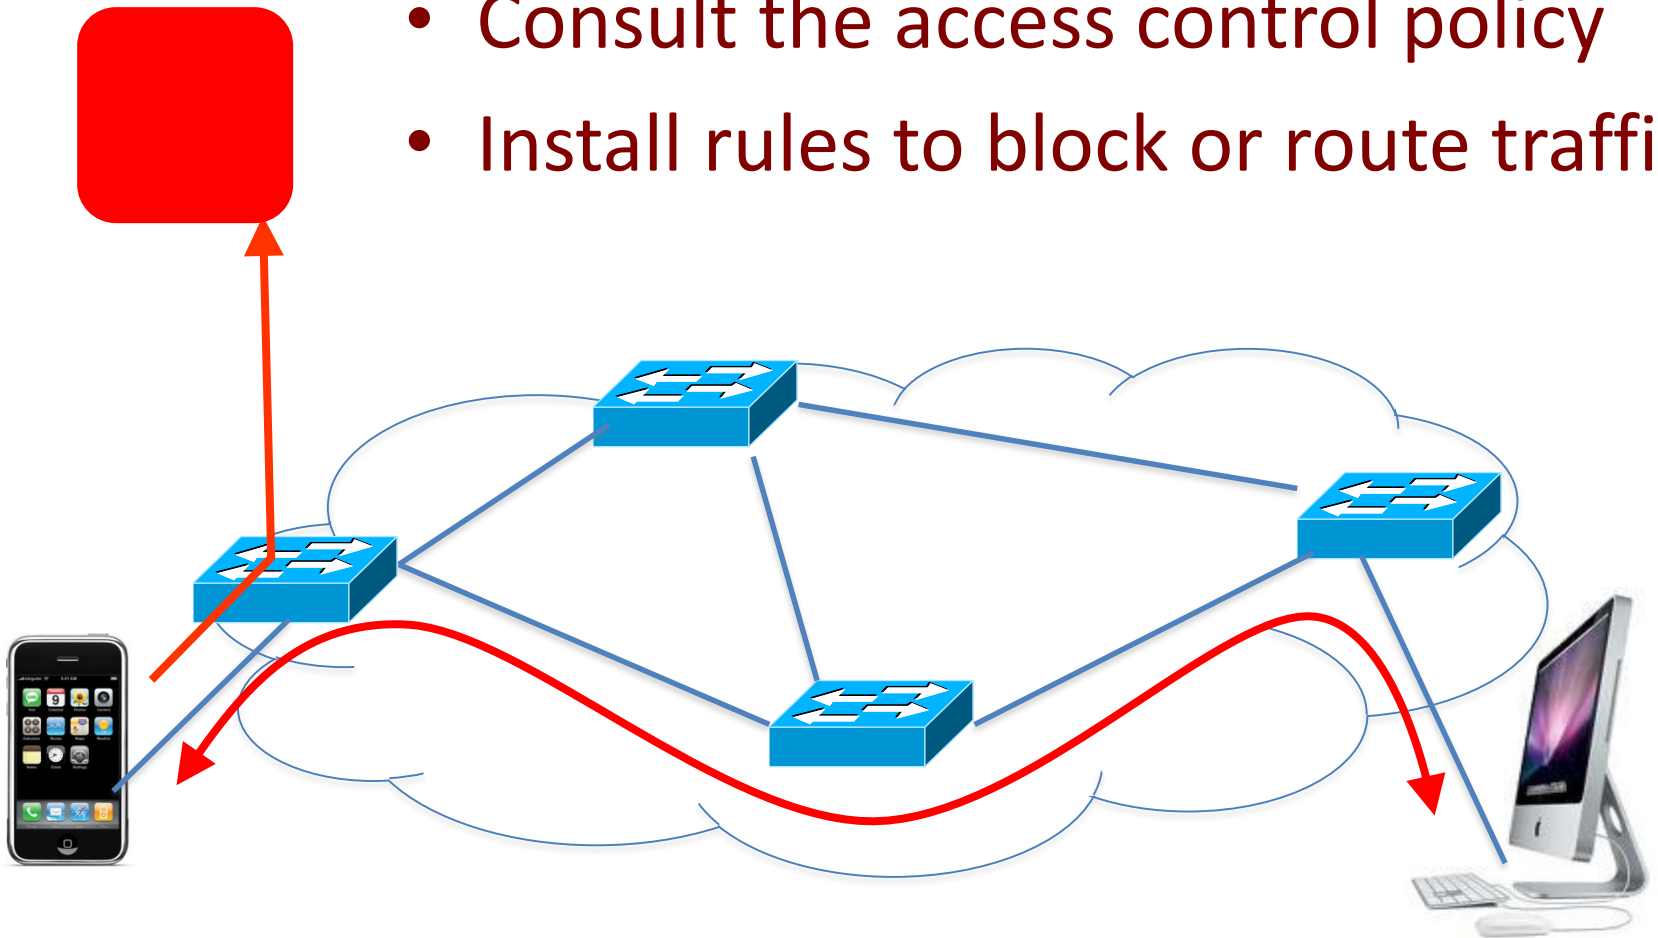


# E.g.: Server Load Balancing



- Pre-install load-balancing policy
- Split traffic based on source IP

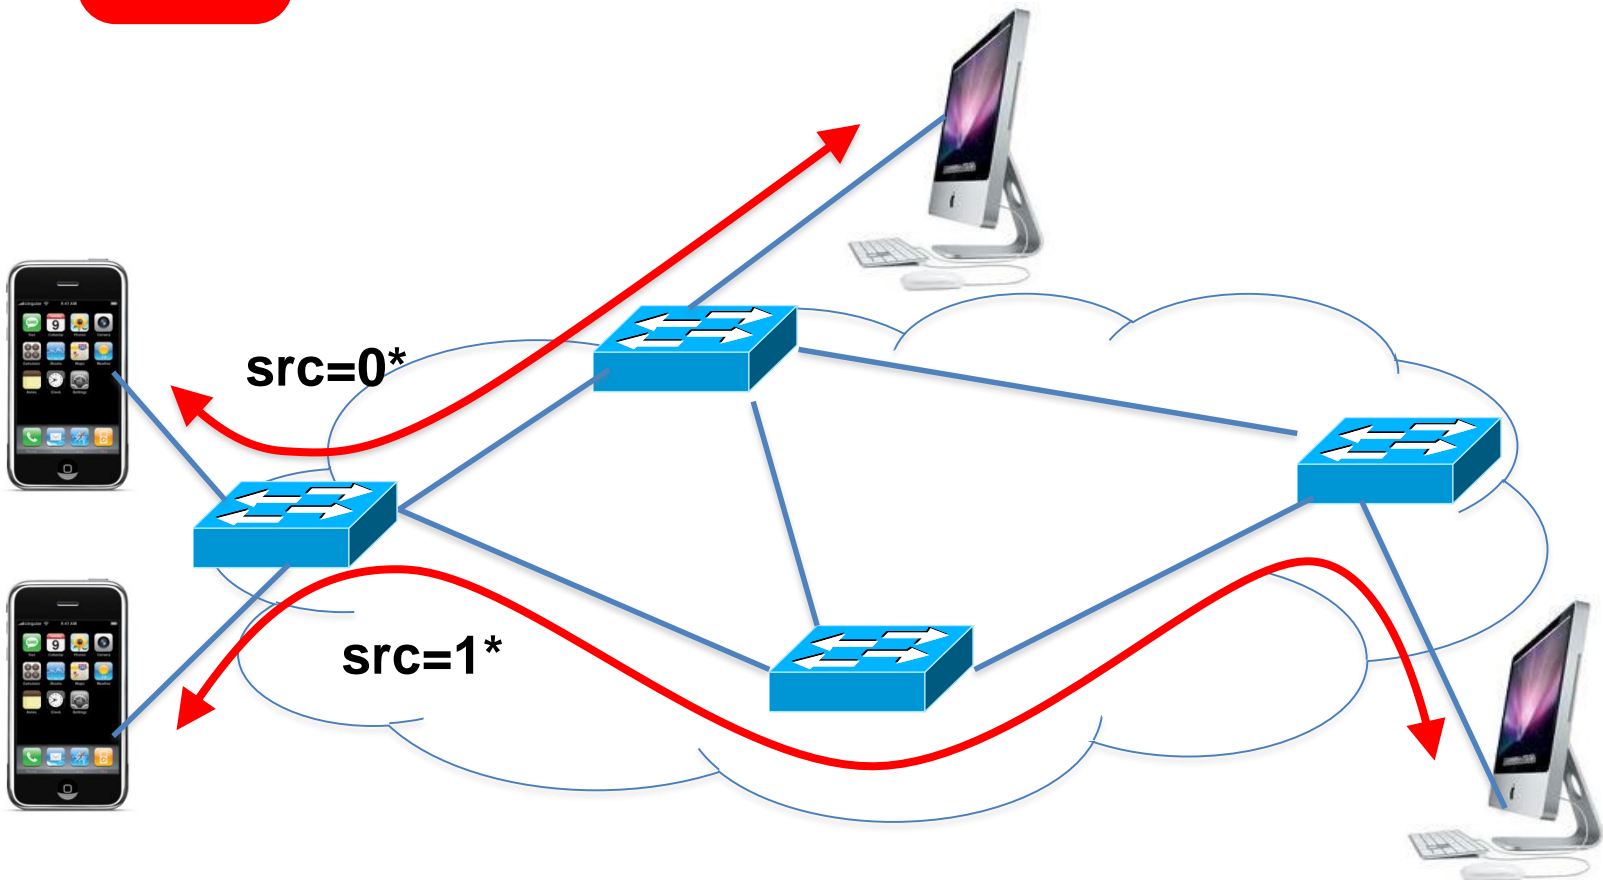

# Routing: Graph abstraction

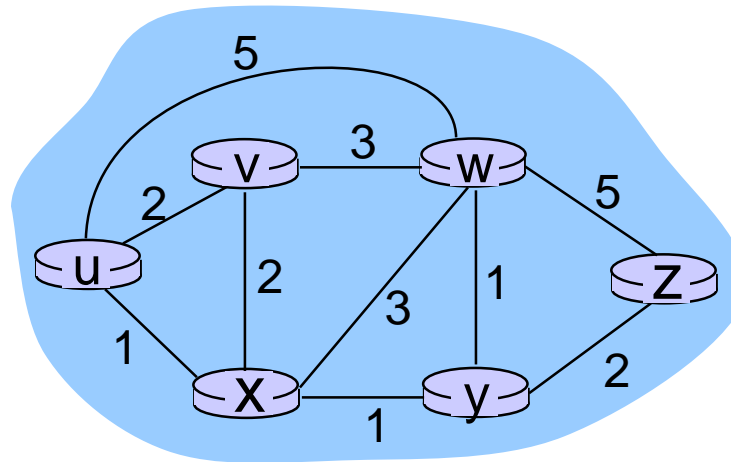


graph:  $G = (N,E)$

$N =$  set of routers =  $\{ u, v, w, x, y, z \}$

$E =$  set of links =  $\{ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) \}$

*aside:* graph abstraction is useful in other network contexts, e.g., P2P, where  $N$  is set of peers and  $E$  is set of TCP connections

# Graph abstraction: costs

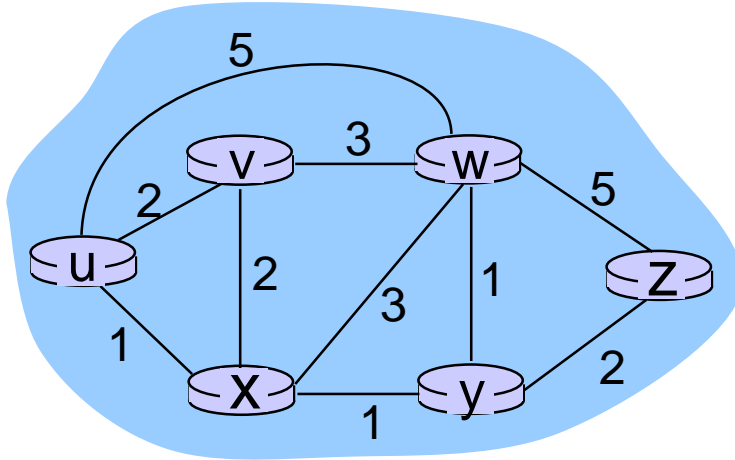

$c(x,x')$  = cost of link  $(x,x')$   
e.g.,  $c(w,z) = 5$

cost could always be 1, or  
inversely related to bandwidth,  
or inversely related to  
congestion

cost of path  $(x_1, x_2, x_3, \dots, x_p) = c(x_1, x_2) + c(x_2, x_3) + \dots + c(x_{p-1}, x_p)$

**key question:** what is the least-cost path between u and z ?  
**routing algorithm:** algorithm that finds that least cost path

# Routing algorithm classification

*Q: global or decentralized information?*

*global:*

- ❖ all routers have complete topology, link cost info
- ❖ “link state” algorithms

*decentralized:*

- ❖ router knows physically-connected neighbors, link costs to neighbors
- ❖ iterative process of computation, exchange of info with neighbors
- ❖ “distance vector” algorithms

*Q: static or dynamic?*

*static:*

- ❖ routes change slowly over time

*dynamic:*

- ❖ routes change more quickly
  - periodic update
  - in response to link cost changes

# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing



# A Link-State Routing Algorithm

## *Dijkstra's algorithm*

- ❖ net topology, link costs known to all nodes
  - accomplished via “link state broadcast”
  - all nodes have same info
- ❖ computes least cost paths from one node (‘source’) to all other nodes
  - gives *forwarding table* for that node
- ❖ iterative: after  $k$  iterations, know least cost path to  $k$  dest.’s

## *notation:*

- ❖  $C(x,y)$ : link cost from node  $x$  to  $y$ ;  $= \infty$  if not direct neighbors
- ❖  $D(v)$ : current value of cost of path from source to dest.  $v$
- ❖  $p(v)$ : predecessor node along path from source to  $v$
- ❖  $N'$ : set of nodes whose least cost path definitively known

# Dijkstra's Algorithm

1 **Initialization:**

2  $N' = \{u\}$

3 for all nodes  $v$

4 if  $v$  adjacent to  $u$

5 then  $D(v) = c(u,v)$

6 else  $D(v) = \infty$

7

8 **Loop**

9 find  $w$  not in  $N'$  such that  $D(w)$  is a minimum

10 add  $w$  to  $N'$

11 update  $D(v)$  for all  $v$  adjacent to  $w$  and not in  $N'$  :

12  **$D(v) = \min( D(v), D(w) + c(w,v) )$**

13 /\* new cost to  $v$  is either old cost to  $v$  or known

14 shortest path cost to  $w$  plus cost from  $w$  to  $v$  \*/


15 **until all nodes in  $N'$**

# Dijkstra's algorithm: example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	$\infty$	$\infty$
1	uw	6,w		5,u	11,w	$\infty$
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy				12,y	
5	uwxvyz					


## notes:

- ❖ construct shortest path tree by tracing predecessor nodes
- ❖ ties can exist (can be broken arbitrarily)

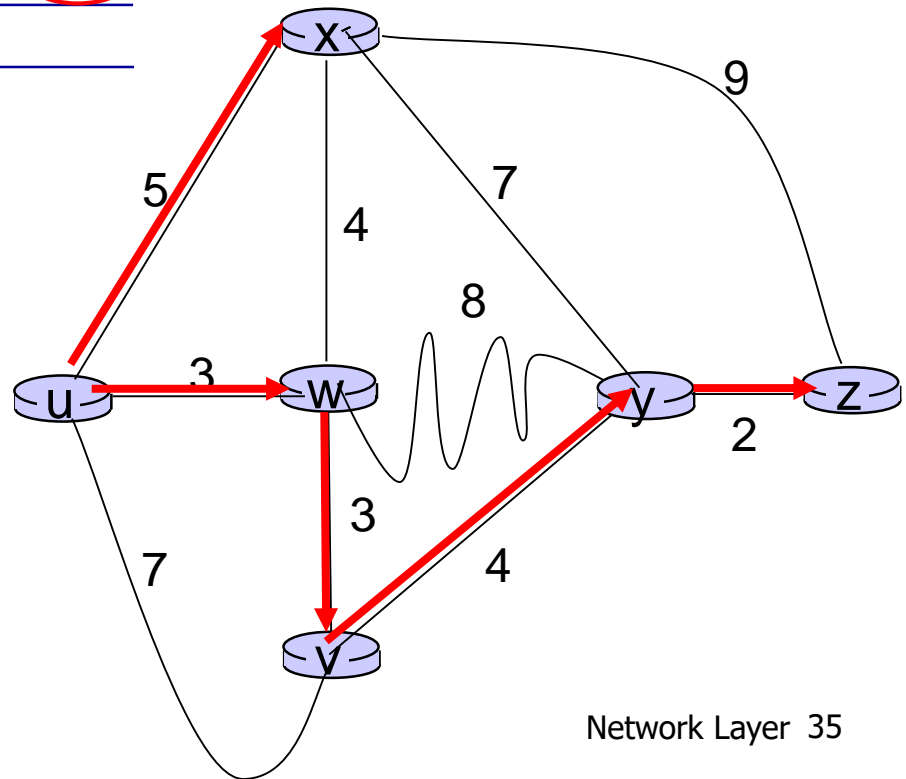


# Dijkstra's algorithm: another example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	$\infty$	$\infty$
1	ux	2,u	4,x		2,x	$\infty$
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					

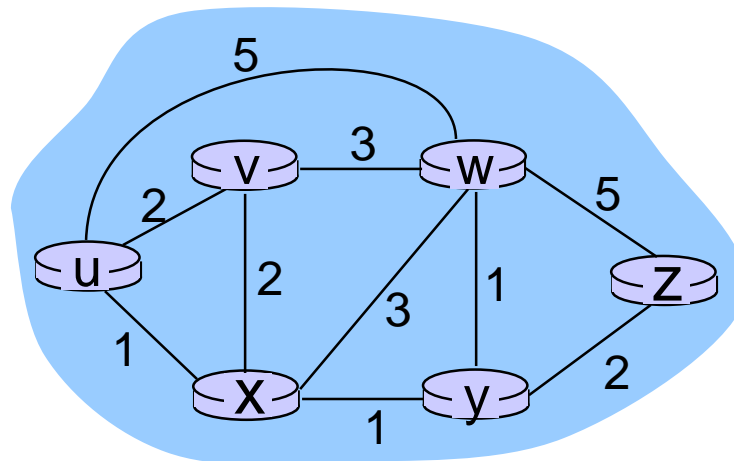

# Dijkstra's algorithm: example (2)

resulting shortest-path tree from u:

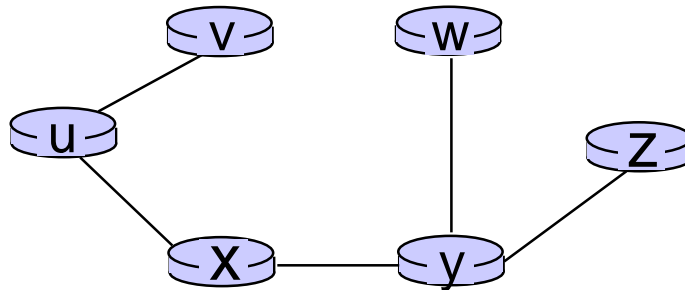

resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)


# Dijkstra's algorithm, discussion

*algorithm complexity:* n nodes


- ❖ each iteration: need to check all nodes, w, not in N
- ❖  $n(n+1)/2$  comparisons:  $O(n^2)$
- ❖ more efficient implementations possible:  $O(n \log n)$

*oscillations possible:*


- ❖ e.g., support link cost equals amount of carried traffic:

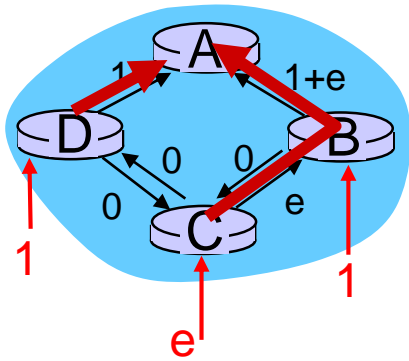


initially

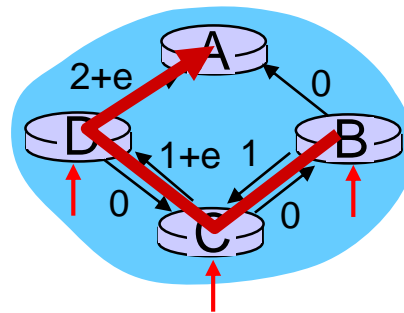

given these costs,  
find new routing....  
resulting in new costs

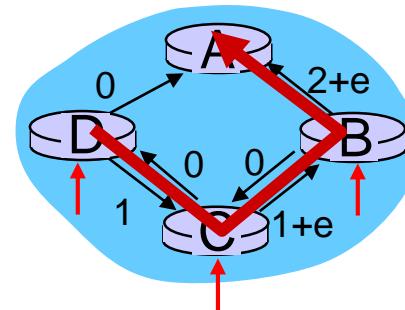

given these costs,  
find new routing....  
resulting in new costs

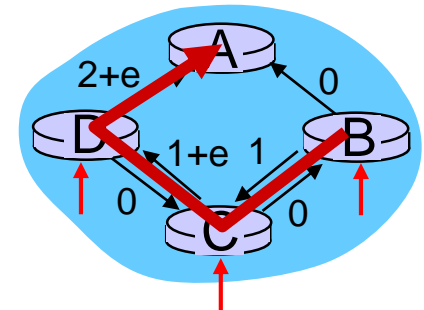

given these costs,  
find new routing....  
resulting in new costs

# Next class

- ❖ Please read Chapter 4.4-4.5 of your textbook  
**BEFORE** Class