

CMPE 150/L : Introduction to Computer Networks

Chen Qian

Computer Engineering
UCSC Baskin Engineering

Lecture 5

Any problem of your lab?

- ❑ Access code?
- ❑ Using Canvas?
- ❑ Email me <cqian12@ucsc.edu>

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

2.6 P2P applications

2.7 socket programming with UDP and TCP


Electronic mail

Three major components:

- ❖ user agents
- ❖ mail servers
- ❖ simple mail transfer protocol: SMTP

User Agent


- ❖ a.k.a. “mail reader”
- ❖ composing, editing, reading mail messages
- ❖ e.g., Outlook, iPhone mail client
- ❖ outgoing, incoming messages stored on server

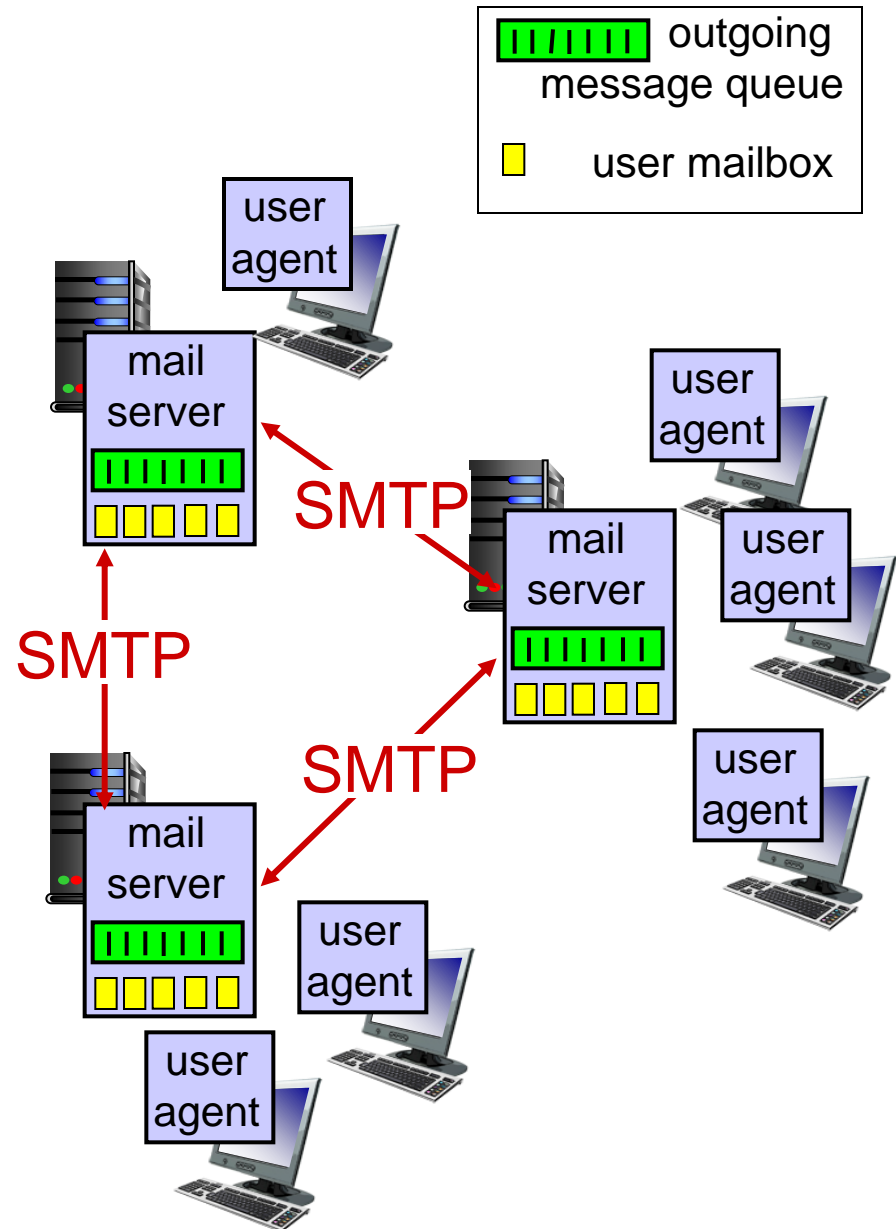

Electronic mail: mail servers

mail servers:

- ❖ *mailbox* contains incoming messages for user
- ❖ *message queue* of outgoing (to be sent) mail messages
- ❖ *SMTP protocol* between mail servers to send email messages
 - client: sending mail server
 - “server”: receiving mail server

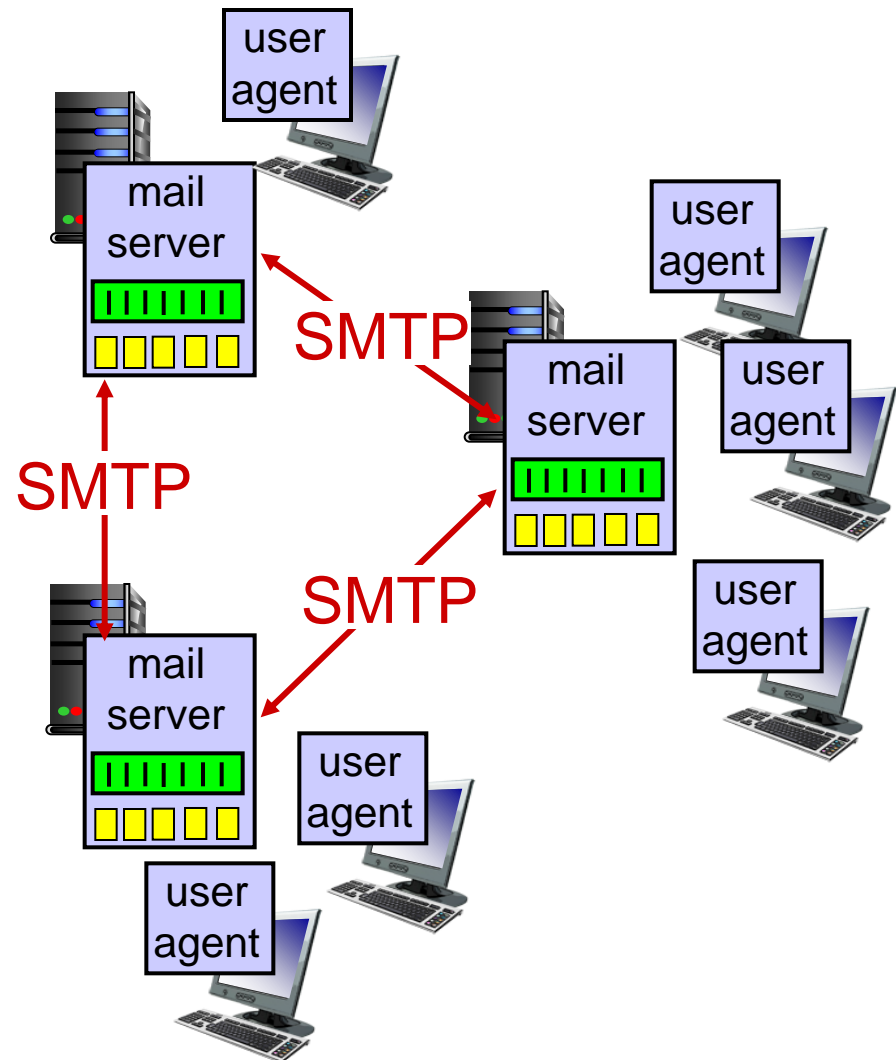


Electronic Mail: SMTP [RFC 2821]

- ❖ uses TCP to reliably transfer email message from client to server, port 25
- ❖ direct transfer: sending server to receiving server
- ❖ three phases of transfer
 - handshaking (greeting)
 - transfer of messages
 - closure

Scenario: Alice sends message to Bob

- 1) Alice uses UA to compose message "to" bob@someschool.edu
- 2) Alice's UA sends message to her mail server; message placed in message queue
- 3) client side of SMTP opens TCP connection with Bob's mail server
- 4) SMTP client sends Alice's message over the TCP connection
- 5) Bob's mail server places the message in Bob's mailbox
- 6) Bob invokes his user agent to read message

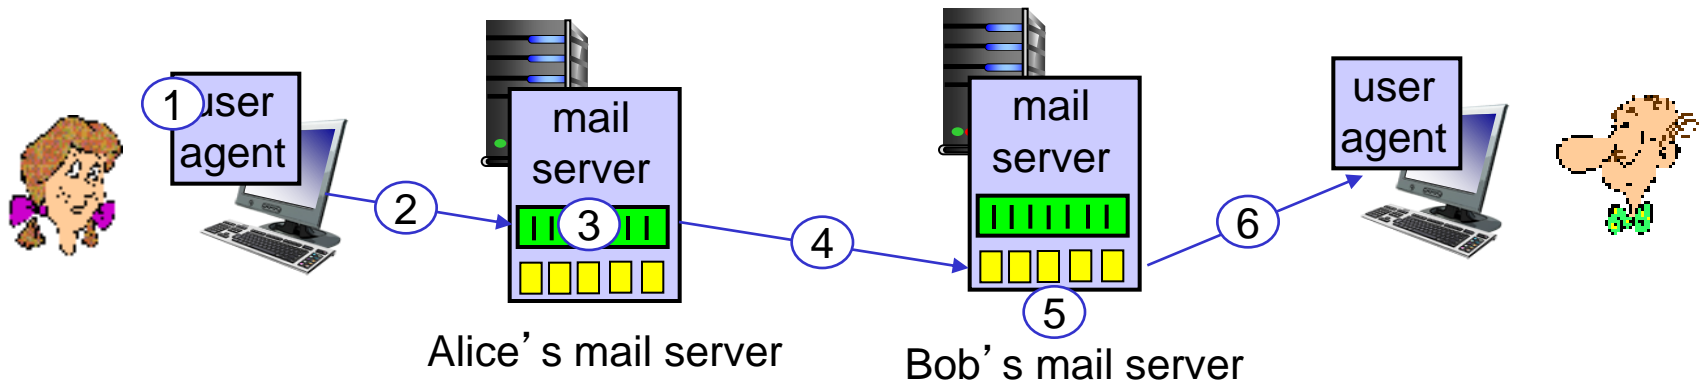

Sample SMTP interaction

```
S: 220 hamburger.edu
C: HELO crepes.fr
S: 250 Hello crepes.fr, pleased to meet you
C: MAIL FROM: <alice@crepes.fr>
S: 250 alice@crepes.fr... Sender ok
C: RCPT TO: <bob@hamburger.edu>
S: 250 bob@hamburger.edu ... Recipient ok
C: DATA
S: 354 Enter mail, end with "." on a line by itself
C: Do you like ketchup?
C: How about pickles?
C: .
S: 250 Message accepted for delivery
C: QUIT
S: 221 hamburger.edu closing connection
```



SMTP: final words

- ❖ SMTP uses persistent connections
- ❖ SMTP requires message (header & body) to be in 7-bit ASCII

comparison with HTTP:

- ❖ HTTP: pull
- ❖ SMTP: push
- ❖ both have ASCII command/response interaction, status codes

Mail access protocols

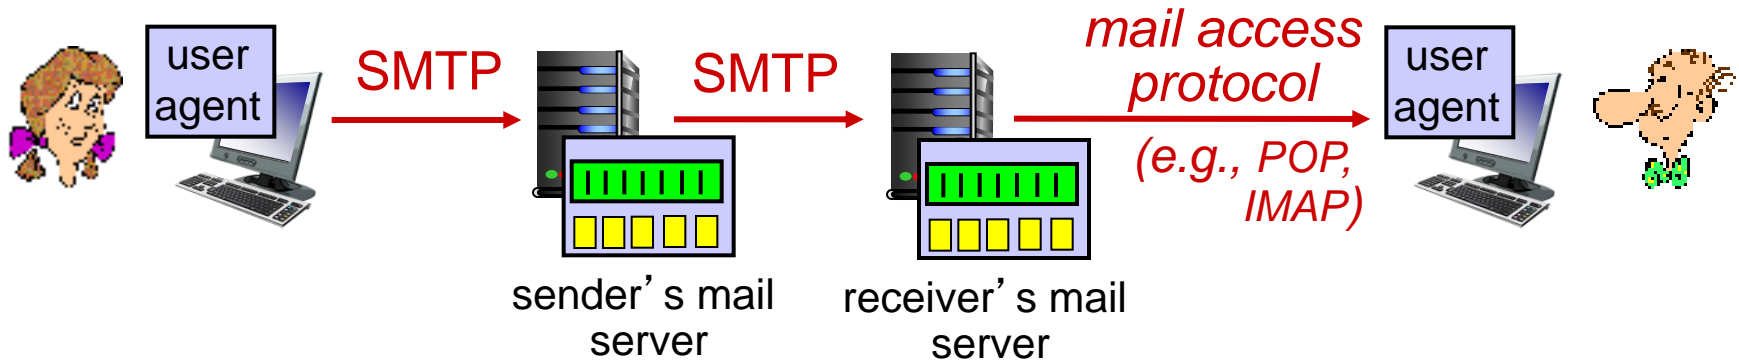

- ❖ **SMTP**: delivery/storage to receiver's server
- ❖ mail access protocol: retrieval from server
 - **POP**: Post Office Protocol [RFC 1939]: authorization, download
 - **IMAP**: Internet Mail Access Protocol [RFC 1730]: more features, including manipulation of stored msgs on server
 - **HTTP**: gmail, Hotmail, Yahoo! Mail, etc.

POP3 and IMAP

POP3

- ❖ POP3 “download and delete” mode
 - Bob cannot re-read e-mail if he changes client
- ❖ POP3 “download-and-keep”: copies of messages on different clients
- ❖ POP3 is stateless across sessions

IMAP

- ❖ keeps all messages in one place: at server
- ❖ allows user to organize messages in folders
- ❖ keeps user state across sessions:
 - names of folders and mappings between message IDs and folder name

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

2.6 P2P applications

2.7 socket programming with UDP and TCP

DNS: domain name system

Internet hosts, routers:


- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., www.yahoo.com - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System:

- ❖ *distributed database* implemented in hierarchy of many *name servers*
- ❖ *application-layer protocol:* hosts, name servers communicate to *resolve* names (address/name translation)

DNS: a distributed, hierarchical database

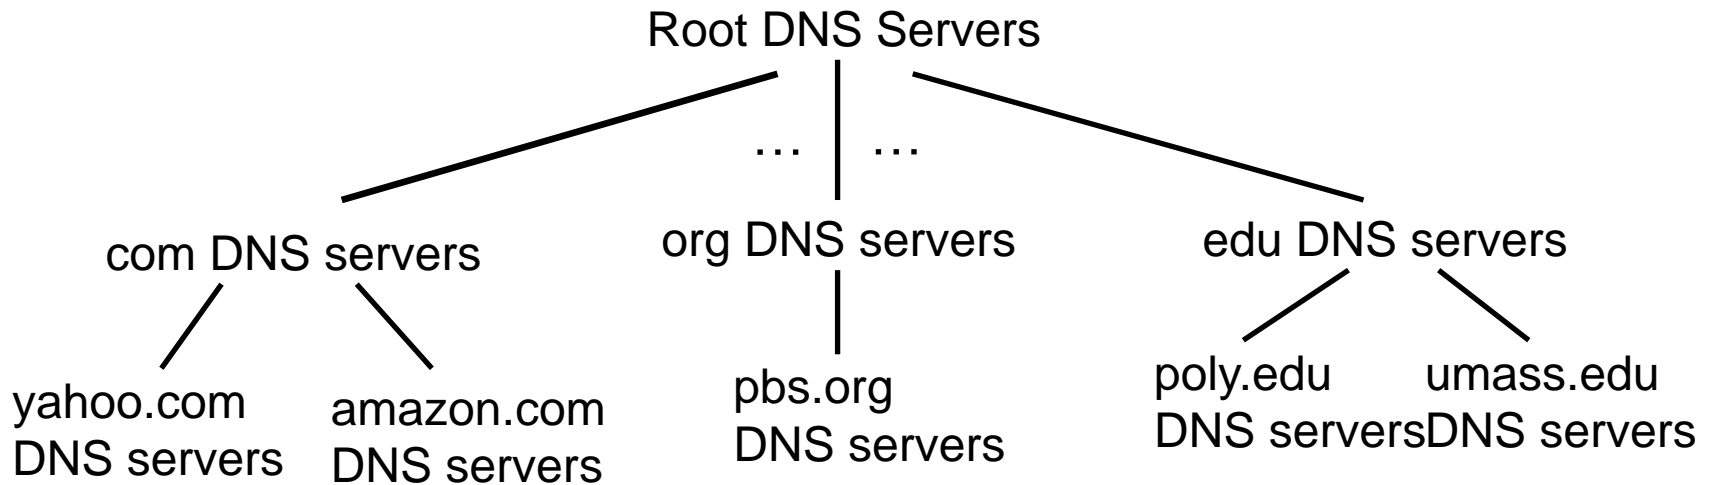

client wants IP for www.amazon.com; 1st approx:

- ❖ client queries root server to find com DNS server
- ❖ client queries .com DNS server to get amazon.com DNS server
- ❖ client queries amazon.com DNS server to get IP address for www.amazon.com

DNS: services, structure

DNS services

- ❖ hostname to IP address translation
- ❖ load distribution
 - replicated Web servers: many IP addresses correspond to one name


why not centralize DNS?

- ❖ single point of failure
- ❖ traffic volume
- ❖ distant centralized database
- ❖ maintenance

A: doesn't scale!

DNS: root name servers

- ❖ contacted by local name server that can not resolve name
- ❖ root name server:
 - contacts authoritative name server if name mapping not known
 - gets mapping
 - returns mapping to local name server

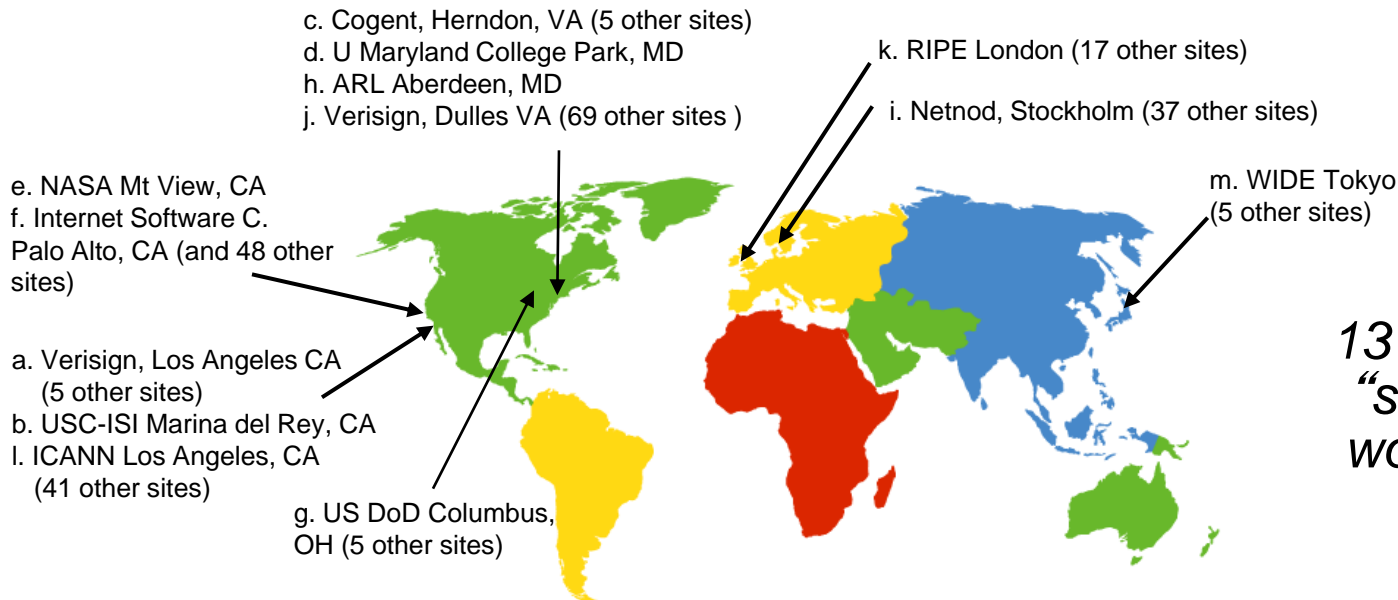

*13 root name
“servers”
worldwide*

TLD, authoritative servers

top-level domain (TLD) servers:

- responsible for com, org, net, edu, aero, jobs, museums, and all top-level country domains, e.g.: uk, fr, ca, jp
- Network Solutions maintains servers for .com TLD
- Educause for .edu TLD

authoritative DNS servers:

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

Local DNS name server


- ❖ each ISP (residential ISP, company, university) has one
 - also called “default name server”
- ❖ when host makes DNS query, query is sent to its local DNS server
 - has local cache of recent name-to-address translation pairs (but may be out of date!)
 - acts as proxy, forwards query into hierarchy

DNS name resolution example

- ❖ host at `cis.poly.edu` wants IP address for `gaia.cs.umass.edu`

iterated query:


- ❖ contacted server replies with name of server to contact
- ❖ “I don’t know this name, but ask this server”

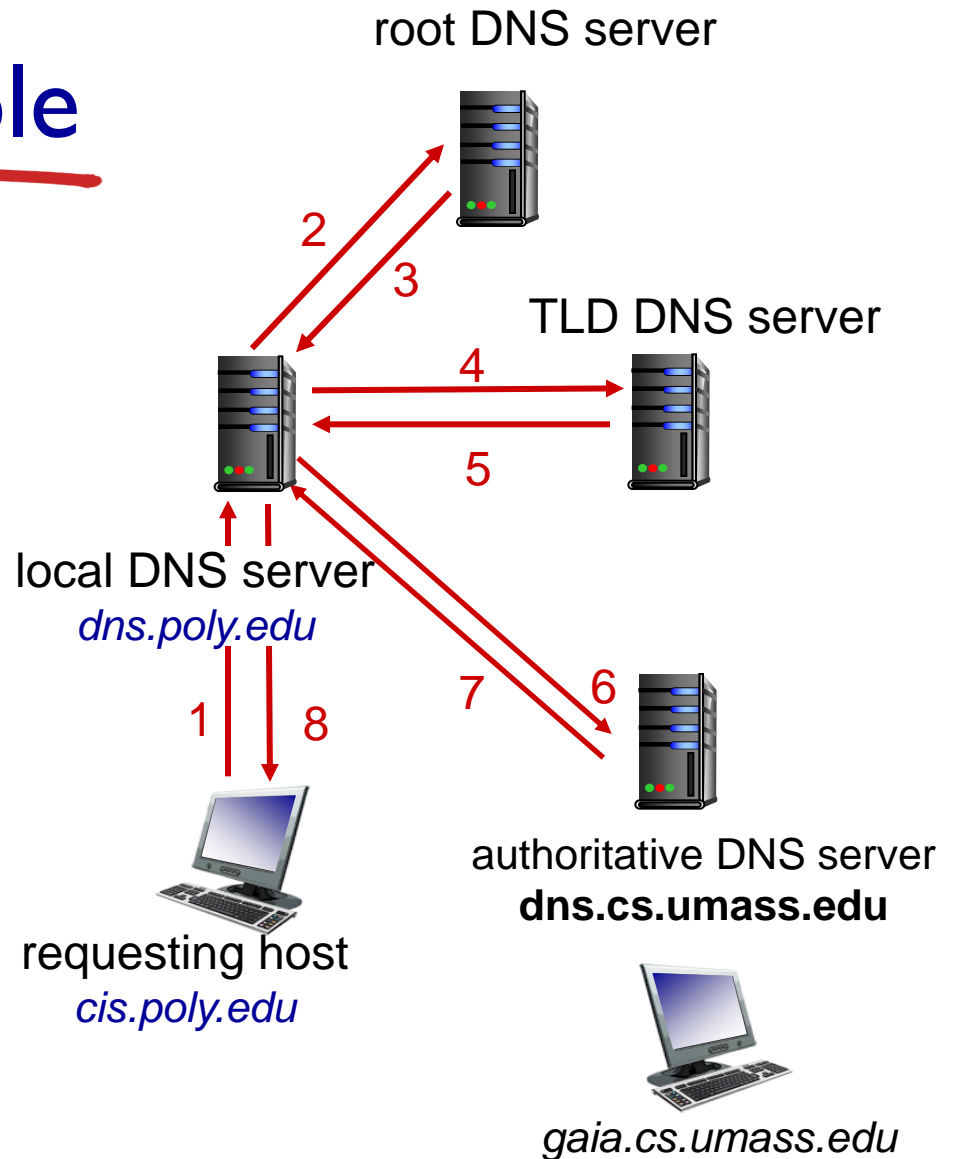

DNS name resolution example

recursive query:

- ❖ puts burden of name resolution on contacted name server
- ❖ heavy load at upper levels of hierarchy?

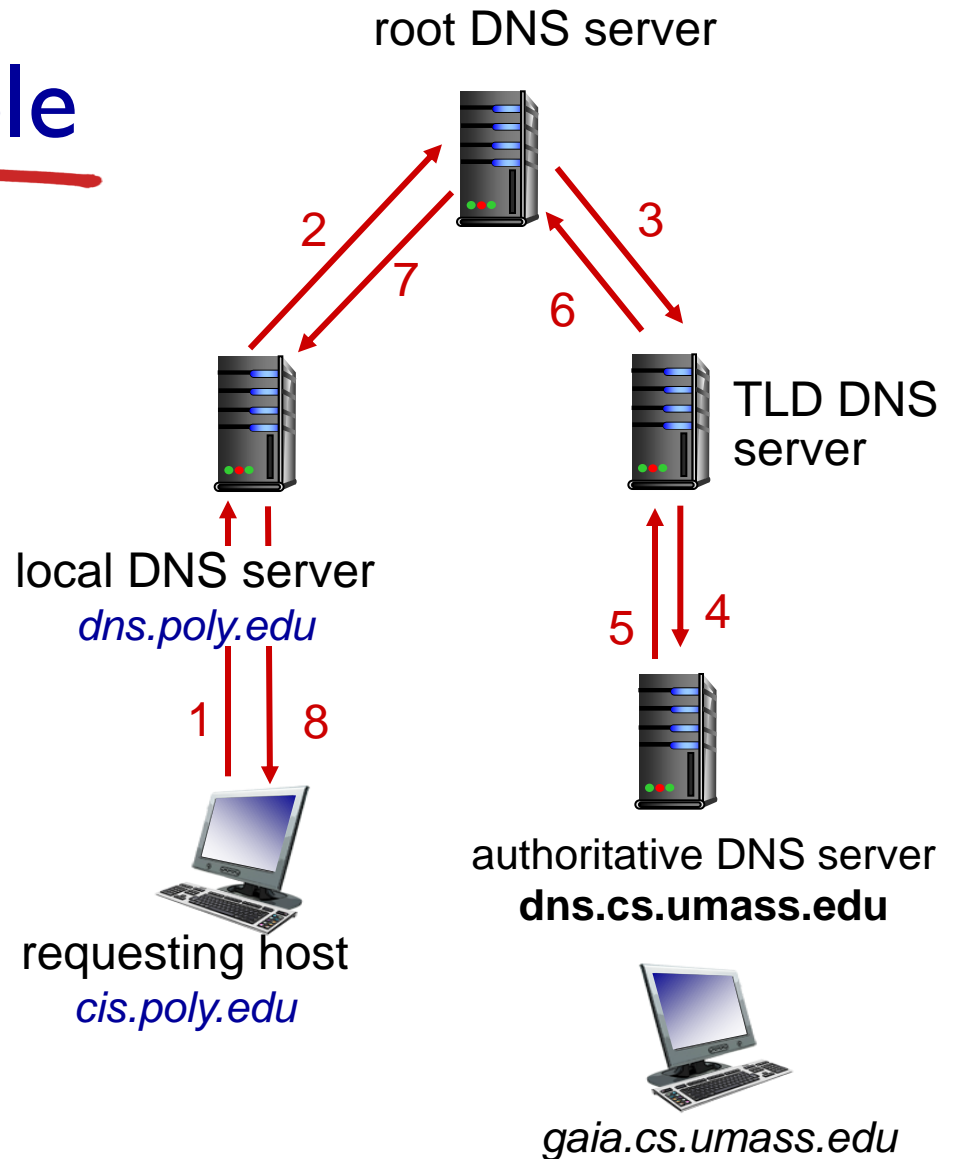

DNS: caching, updating records

- ❖ once (any) name server learns mapping, it *caches* mapping
 - cache entries timeout (disappear) after some time (TTL)
 - TLD servers typically cached in local name servers
 - thus root name servers not often visited
- ❖ cached entries may be *out-of-date* (best effort name-to-address translation!)
 - if name host changes IP address, may not be known Internet-wide until all TTLs expire

Attacking DNS

DDoS attacks

- ❖ Bombard root servers with traffic
 - Not successful to date
 - Traffic Filtering
 - Local DNS servers cache IPs of TLD servers, allowing root server bypass
- ❖ Bombard TLD servers
 - Potentially more dangerous

Redirect attacks

- ❖ Man-in-middle
 - Intercept queries
- ❖ DNS poisoning
 - Send bogus replies to DNS server, which caches

Exploit DNS for DDoS

- ❖ Send queries with spoofed source address: target IP
- ❖ Requires amplification

Next class

- ❖ Please read Chapter 2.5-2.7 of your textbook
BEFORE Class