

CMPE 150/L : Introduction to Computer Networks

Chen Qian

Computer Engineering
UCSC Baskin Engineering

Lecture 6

Any problem of your lab?

- Due by this Sunday (Jan 29)

Homework questions

- ❑ Available on course website
- ❑ **Please work on them**, but do not submit your answers. The answers will be posted later.

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

2.6 P2P applications

2.7 socket programming with UDP and TCP

DNS: domain name system

Internet hosts, routers:


- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., www.yahoo.com - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System:

- ❖ *distributed database* implemented in hierarchy of many *name servers*
- ❖ *application-layer protocol:* hosts, name servers communicate to *resolve* names (address/name translation)

DNS: a distributed, hierarchical database

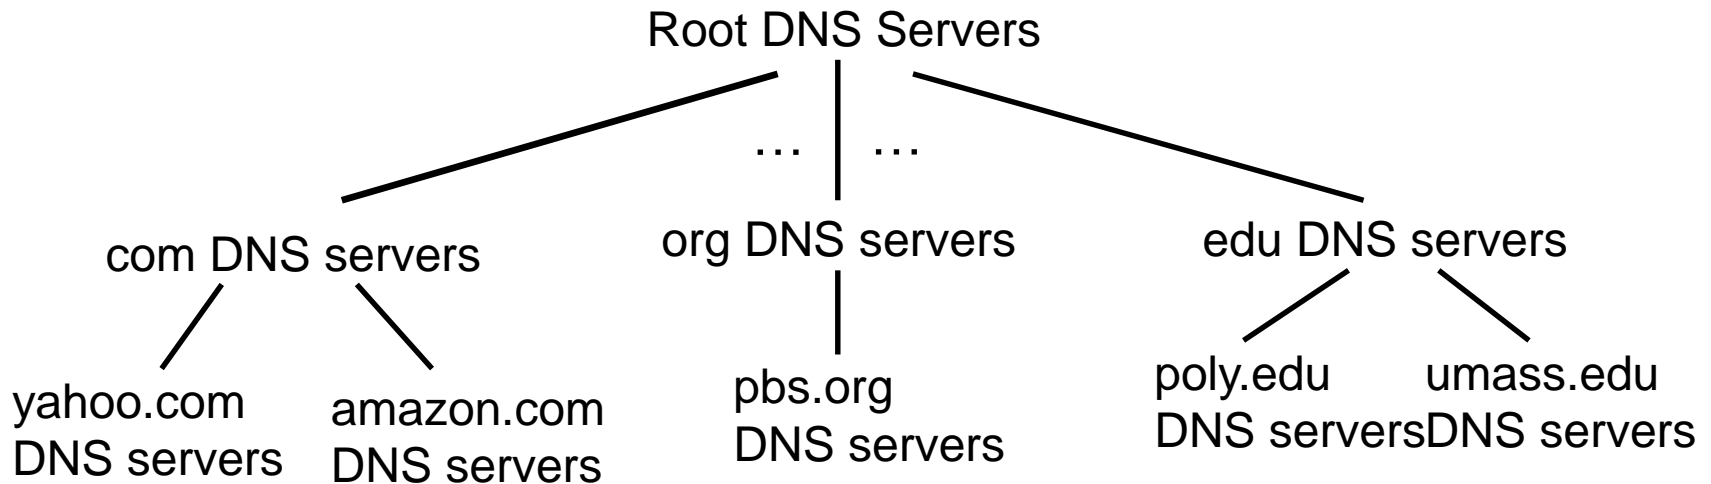

client wants IP for www.amazon.com; 1st approx:

- ❖ client queries root server to find com DNS server
- ❖ client queries .com DNS server to get amazon.com DNS server
- ❖ client queries amazon.com DNS server to get IP address for www.amazon.com

DNS: services, structure

DNS services

- ❖ hostname to IP address translation
- ❖ load distribution
 - replicated Web servers: many IP addresses correspond to one name


why not centralize DNS?

- ❖ single point of failure
- ❖ traffic volume
- ❖ distant centralized database
- ❖ maintenance

A: doesn't scale!

DNS: root name servers

- ❖ contacted by local name server that can not resolve name
- ❖ root name server:
 - contacts authoritative name server if name mapping not known
 - gets mapping
 - returns mapping to local name server

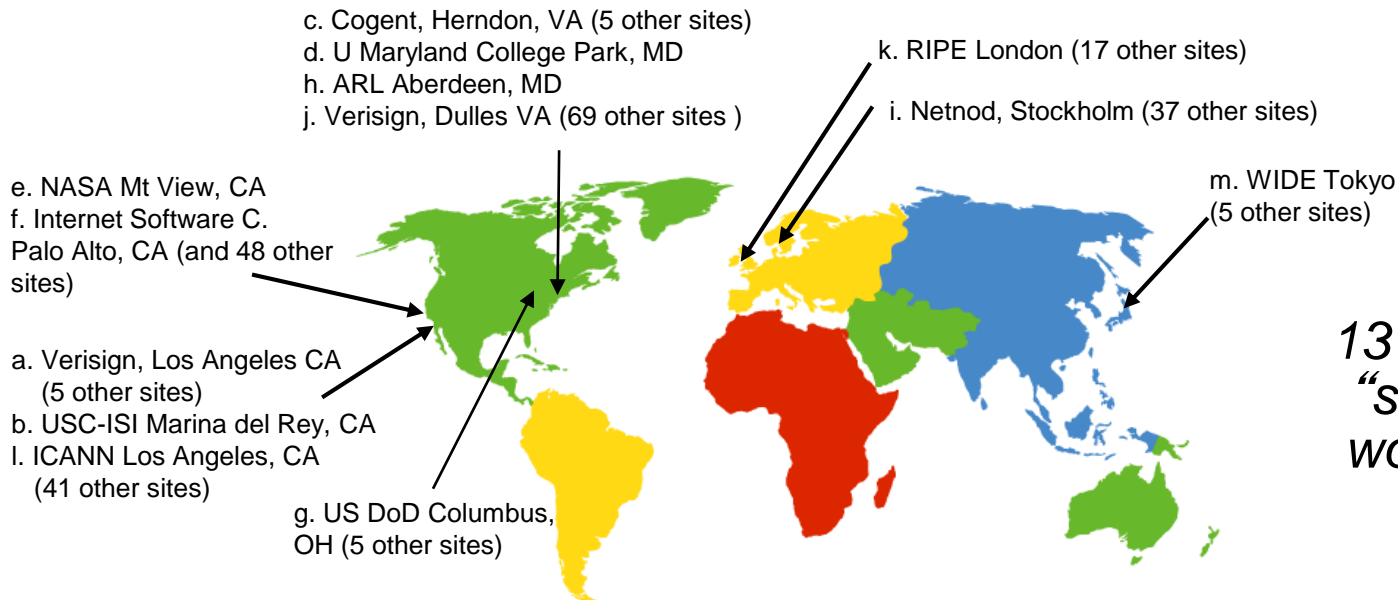

*13 root name
“servers”
worldwide*

TLD, authoritative servers

top-level domain (TLD) servers:

- responsible for com, org, net, edu, aero, jobs, museums, and all top-level country domains, e.g.: uk, fr, ca, jp
- Network Solutions maintains servers for .com TLD
- Educause for .edu TLD

authoritative DNS servers:

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

Local DNS name server


- ❖ each ISP (residential ISP, company, university) has one
 - also called “default name server”
- ❖ when host makes DNS query, query is sent to its local DNS server
 - has local cache of recent name-to-address translation pairs (but may be out of date!)
 - acts as proxy, forwards query into hierarchy

DNS name resolution example

- ❖ host at cis.poly.edu wants IP address for gaia.cs.umass.edu

iterated query:


- ❖ contacted server replies with name of server to contact
- ❖ “I don’t know this name, but ask this server”

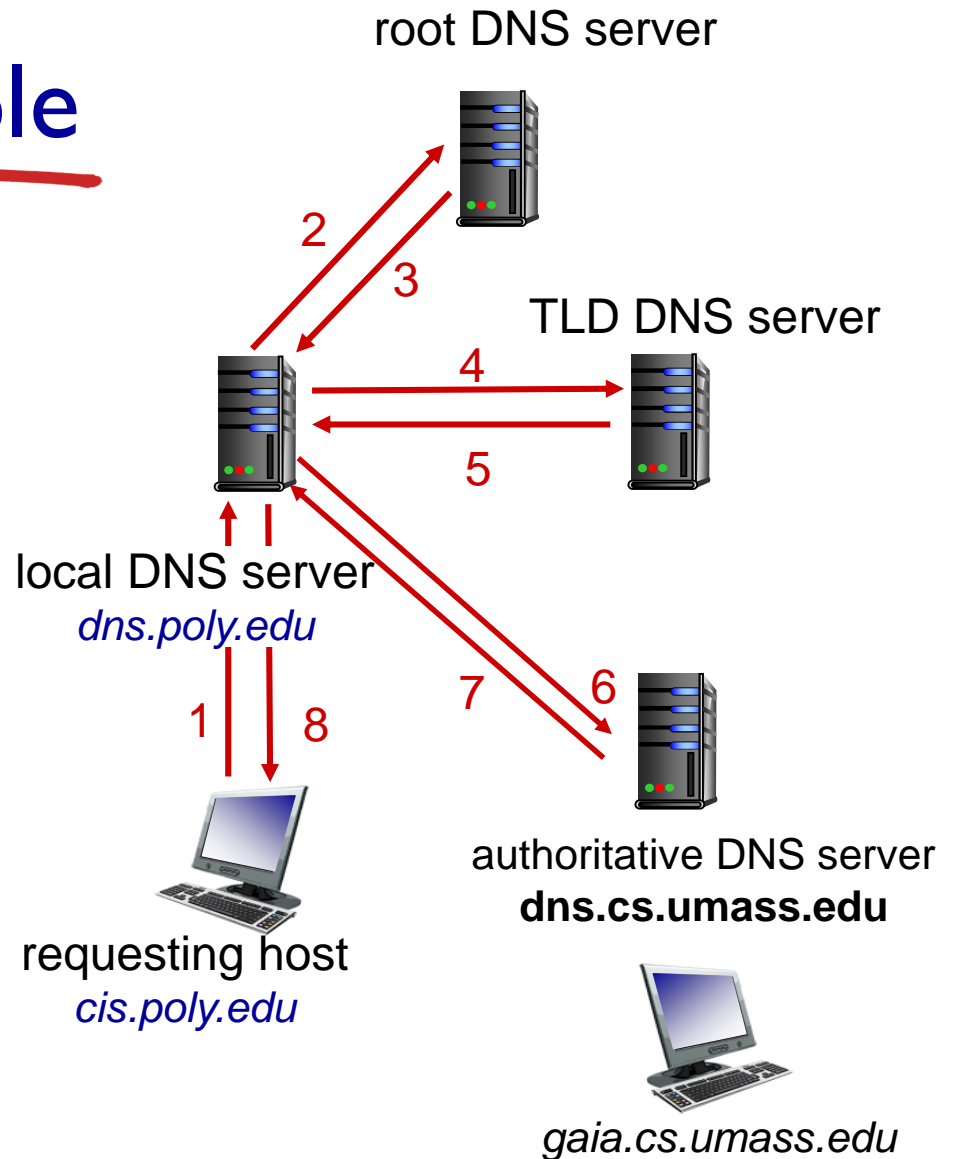

DNS name resolution example

recursive query:

- ❖ puts burden of name resolution on contacted name server
- ❖ heavy load at upper levels of hierarchy?

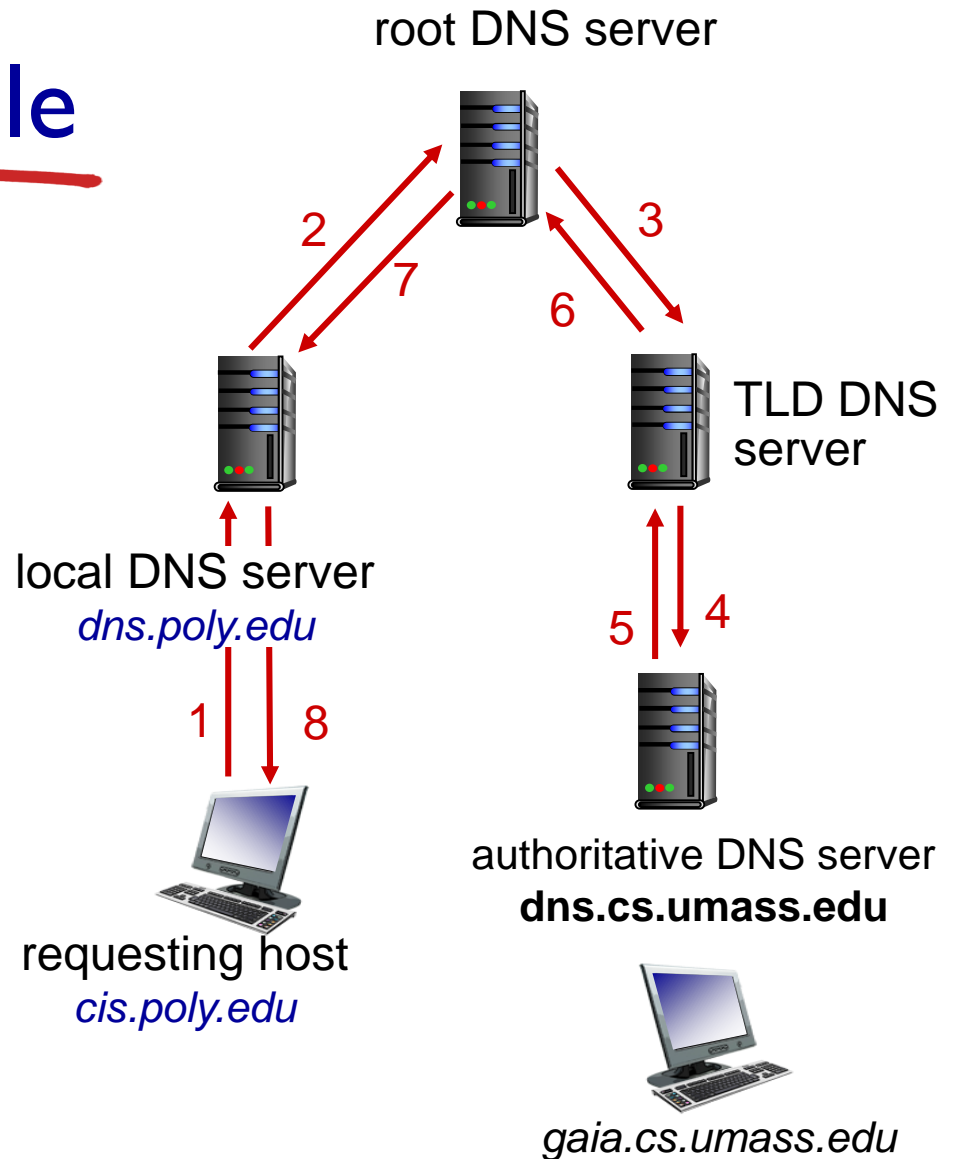

DNS: caching, updating records

- ❖ once (any) name server learns mapping, it *caches* mapping
 - cache entries timeout (disappear) after some time (TTL)
 - TLD servers typically cached in local name servers
 - thus root name servers not often visited
- ❖ cached entries may be *out-of-date* (best effort name-to-address translation!)
 - if name host changes IP address, may not be known Internet-wide until all TTLs expire

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

2.6 P2P applications


2.7 socket programming with UDP and TCP

P2P architecture

- ❖ *no* always-on server
- ❖ arbitrary end systems directly communicate
- ❖ peers are intermittently connected and change IP addresses

examples:


- file distribution (BitTorrent)
 - Streaming (KanKan)
 - VoIP (Skype)
-
- ❖ **However, most of them requires a central server to manage the peers**

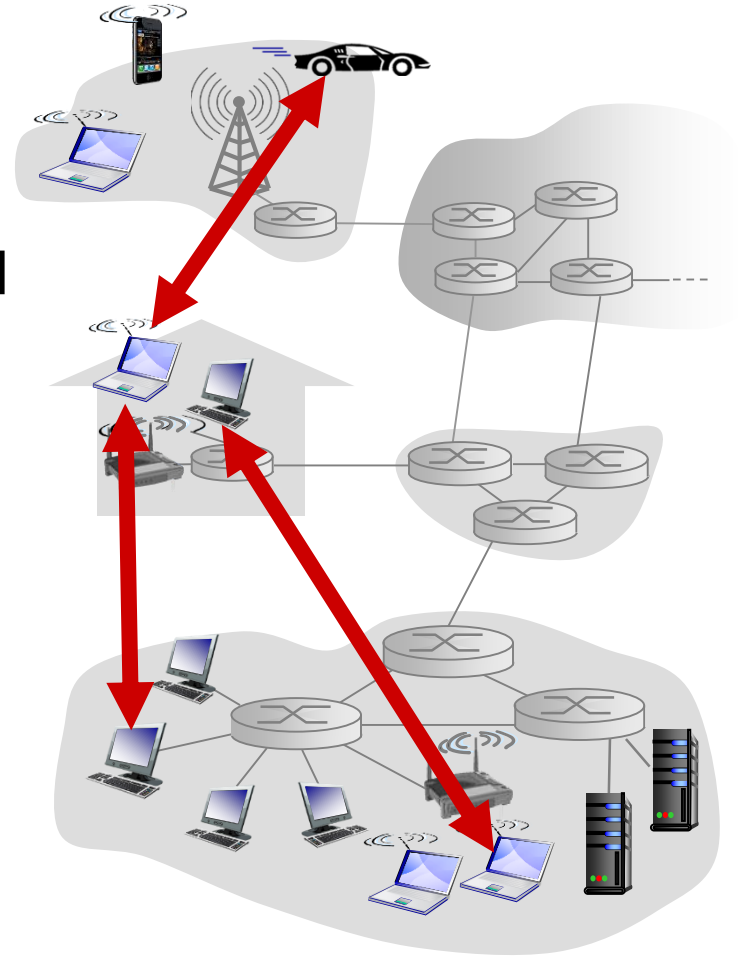

File distribution: client-server vs P2P

Question: how much time to distribute file (size F) from one server to N peers?

- peer upload/download capacity is limited resource

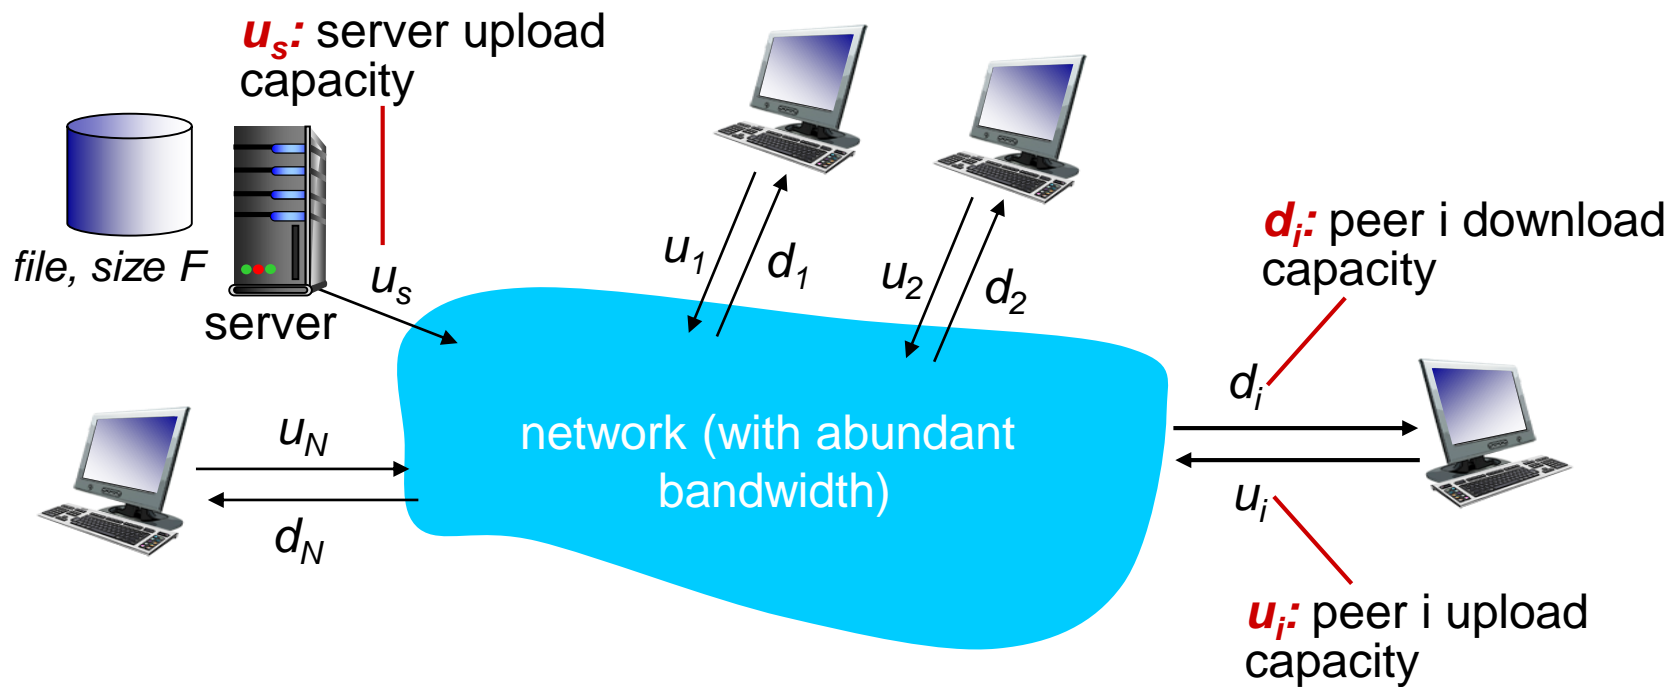


File distribution time: client-server

- ❖ **server transmission:** must sequentially send (upload) N file copies:

- time to send one copy: F/u_s
- time to send N copies: NF/u_s

- ❖ **client:** each client must download file copy

- d_{\min} = min client download rate
- min client download time: F/d_{\min}

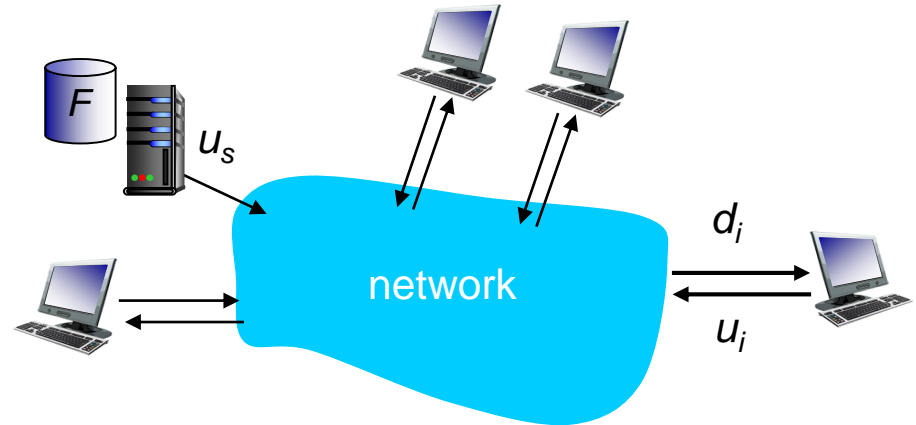


*time to distribute F
to N clients using
client-server approach*

$$D_{c-s} \geq \max\{NF/u_s, F/d_{\min}\}$$

increases linearly in N

File distribution time: P2P

- ❖ **server transmission:** must upload at least one copy
 - time to send one copy: F/u_s
- ❖ **client:** each client must download file copy
 - min client download time: F/d_{\min}
- ❖ **clients:** as aggregate must download NF bits
 - max upload rate (limiting max download rate) is $u_s + \sum u_i$

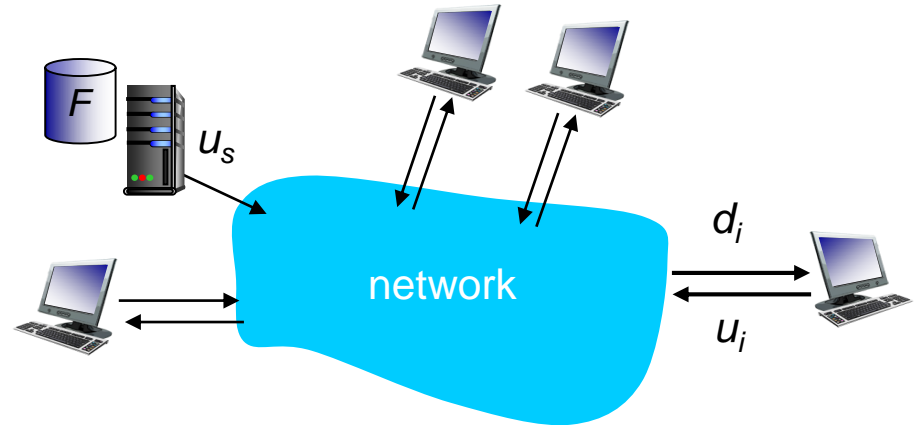

*time to distribute F
to N clients using
P2P approach*


$$D_{P2P} \geq \max\{F/u_s, F/d_{\min}, NF/(u_s + \sum u_i)\}$$

increases linearly in N ...

... but so does this, as each peer brings service capacity

Client-server vs. P2P: example

client upload rate = u , $F/u = 1$ hour, $u_s = 10u$, $d_{min} \geq u_s$

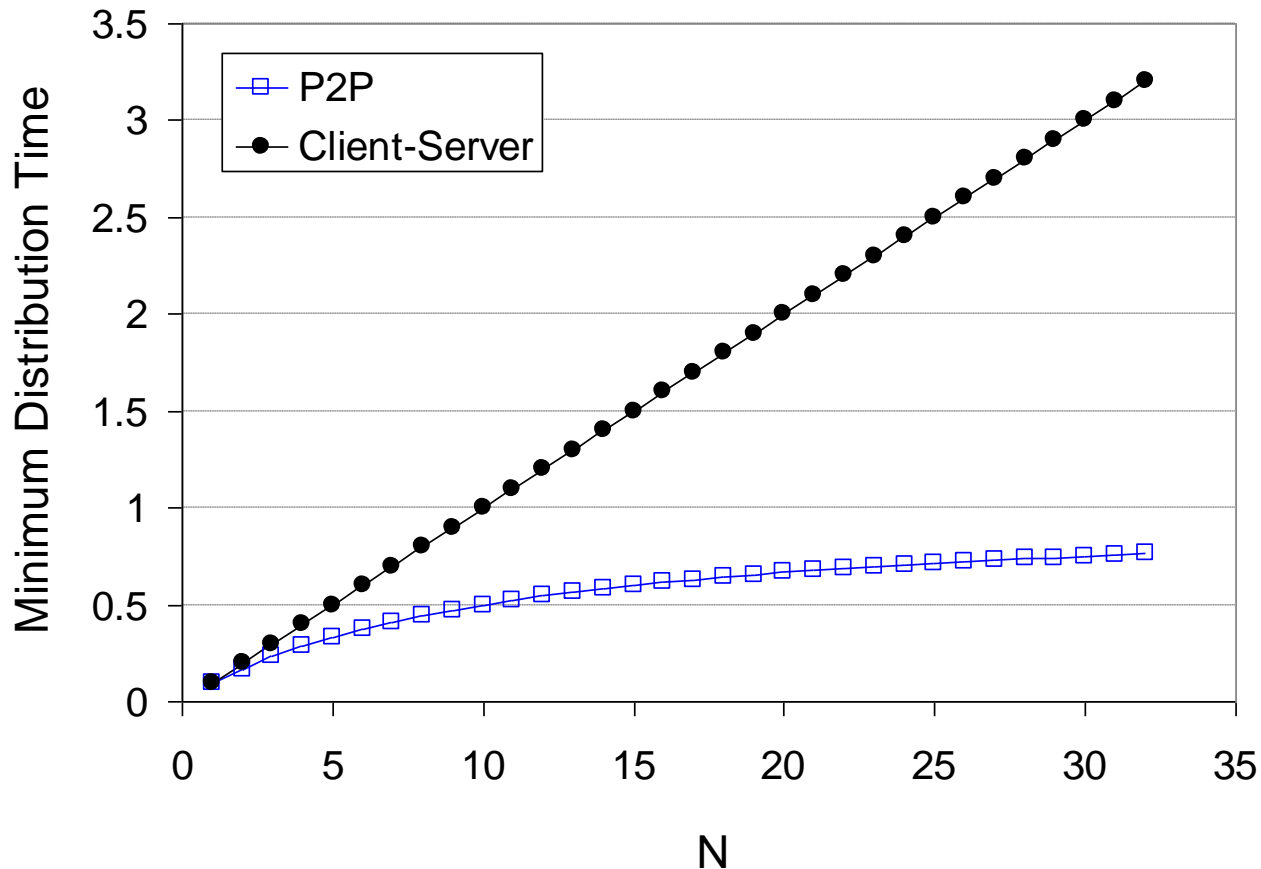


P2P file distribution: BitTorrent

- ❖ file divided into 256Kb chunks
- ❖ peers in torrent send/receive file chunks


tracker: tracks peers participating in torrent

torrent: group of peers exchanging chunks of a file

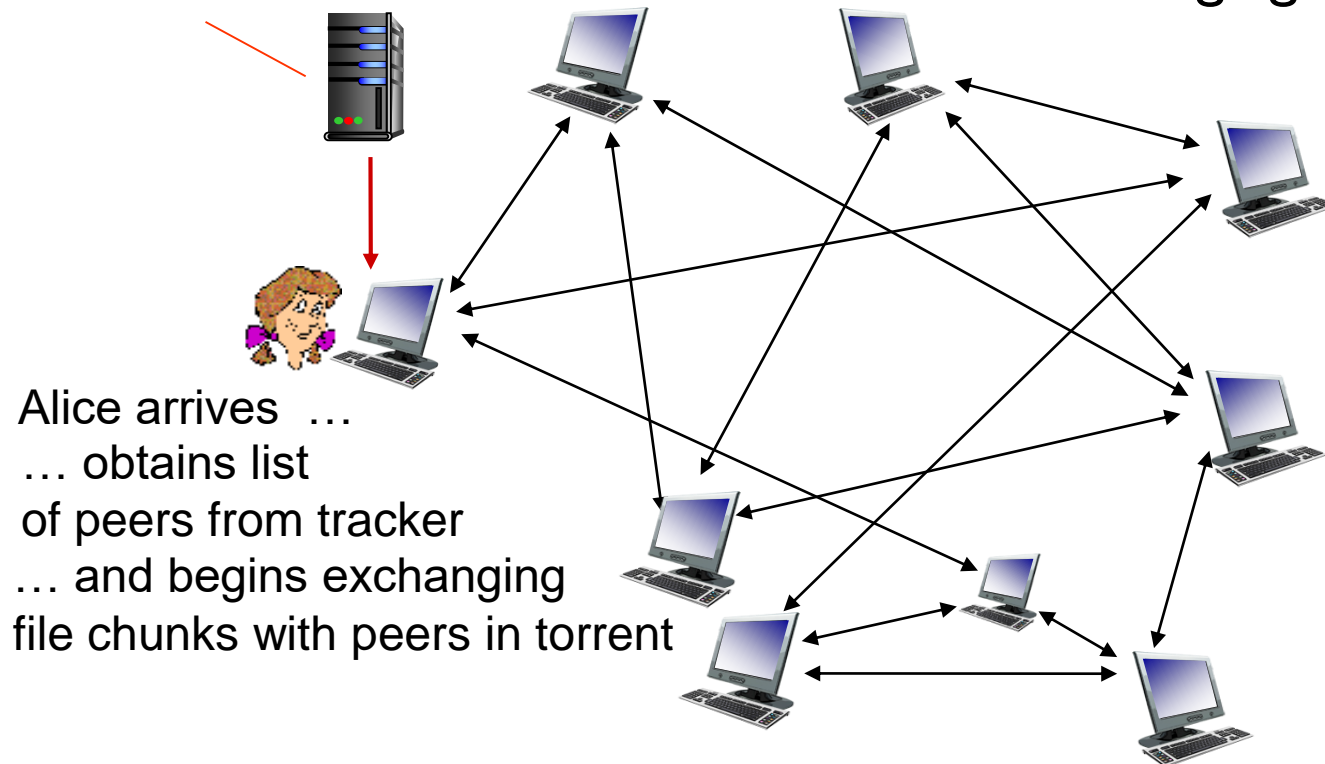

P2P file distribution: BitTorrent

- ❖ peer joining torrent:
 - has no chunks, but will accumulate them over time from other peers
 - registers with tracker to get list of peers, connects to subset of peers (“neighbors”)
- ❖ while downloading, peer uploads chunks to other peers
- ❖ peer may change peers with whom it exchanges chunks
- ❖ *churn*: peers may come and go
- ❖ once peer has entire file, it may (selfishly) leave or (altruistically) remain in torrent

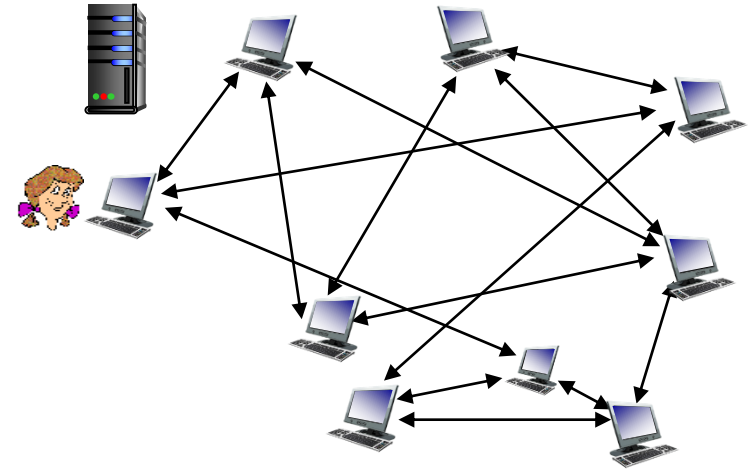

BitTorrent: requesting, sending file chunks

requesting chunks:


- ❖ at any given time, different peers have different subsets of file chunks
- ❖ periodically, Alice asks each peer for list of chunks that they have
- ❖ Alice requests missing chunks from peers, rarest first

sending chunks: tit-for-tat

- ❖ Alice sends chunks to those four peers currently sending her chunks *at highest rate*
 - other peers are choked by Alice (do not receive chunks from her)
 - re-evaluate top 4 every 10 secs
- ❖ every 30 secs: randomly select another peer, starts sending chunks
 - “optimistically unchoke” this peer
 - newly chosen peer may join top 4

BitTorrent: tit-for-tat

- (1) Alice “optimistically unchokes” Bob
- (2) Alice becomes one of Bob’s top-four providers; Bob reciprocates
- (3) Bob becomes one of Alice’s top-four providers

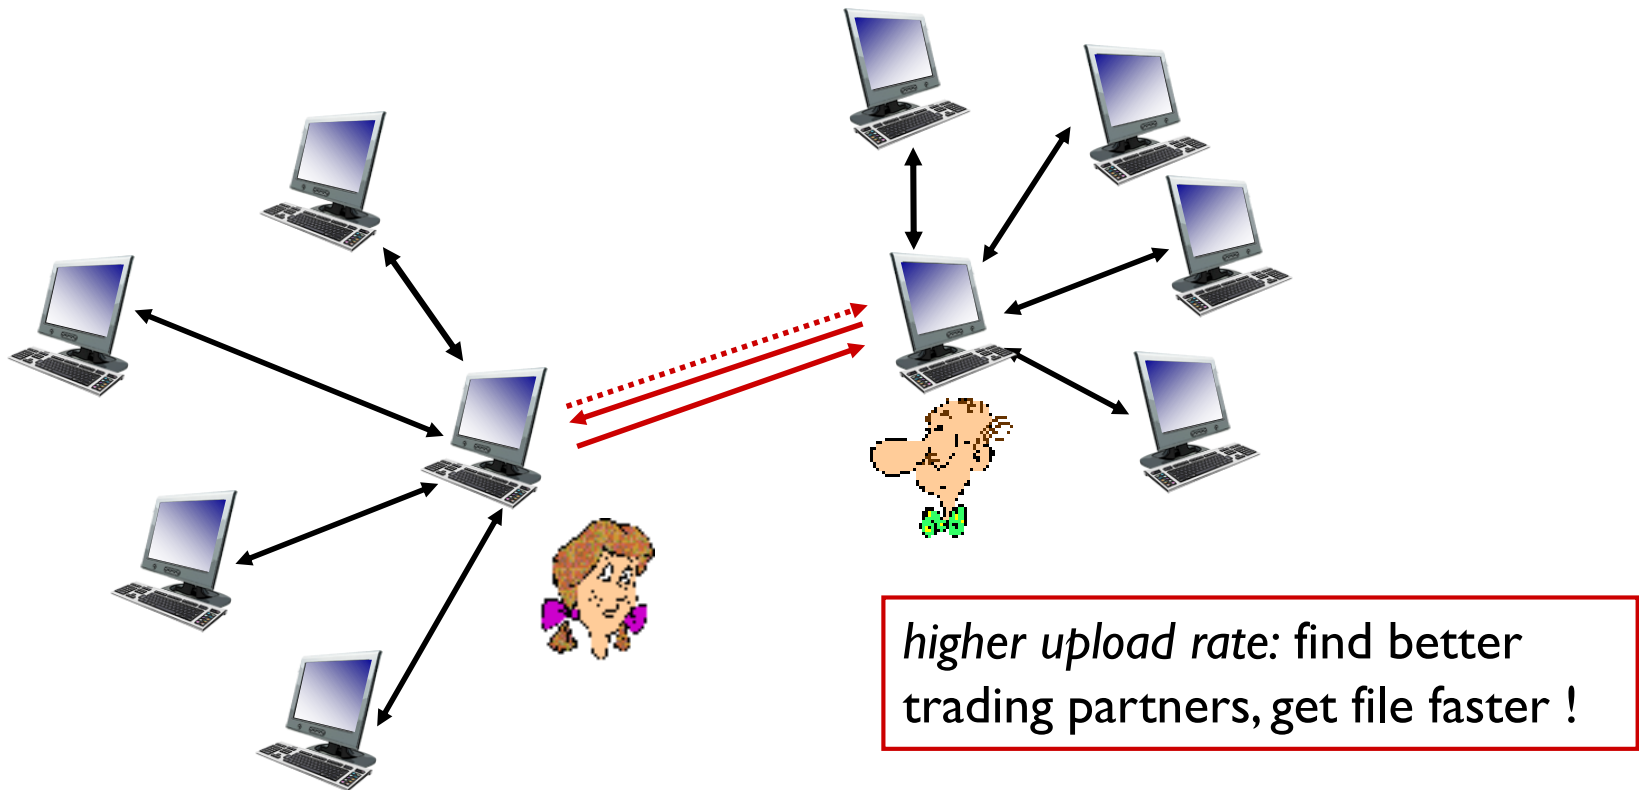

Lecture by Ion Stoica



Ion Stoica



Executive Chairman of Databricks

Ion Stoica is a Romanian-American computer scientist specializing in distributed systems, cloud computing and computer networking. He is currently a professor of computer science at the University of California Berkeley, co-director of AMPLab. [Wikipedia](#)

<https://www.youtube.com/watch?v=AVtRwriSqiE&t=2819s>

2:30- 8:57

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS


2.6 P2P applications

2.7 socket programming with UDP and TCP

Socket programming

goal: learn how to build client/server applications that communicate using sockets

socket: door between application process and end-end-transport protocol

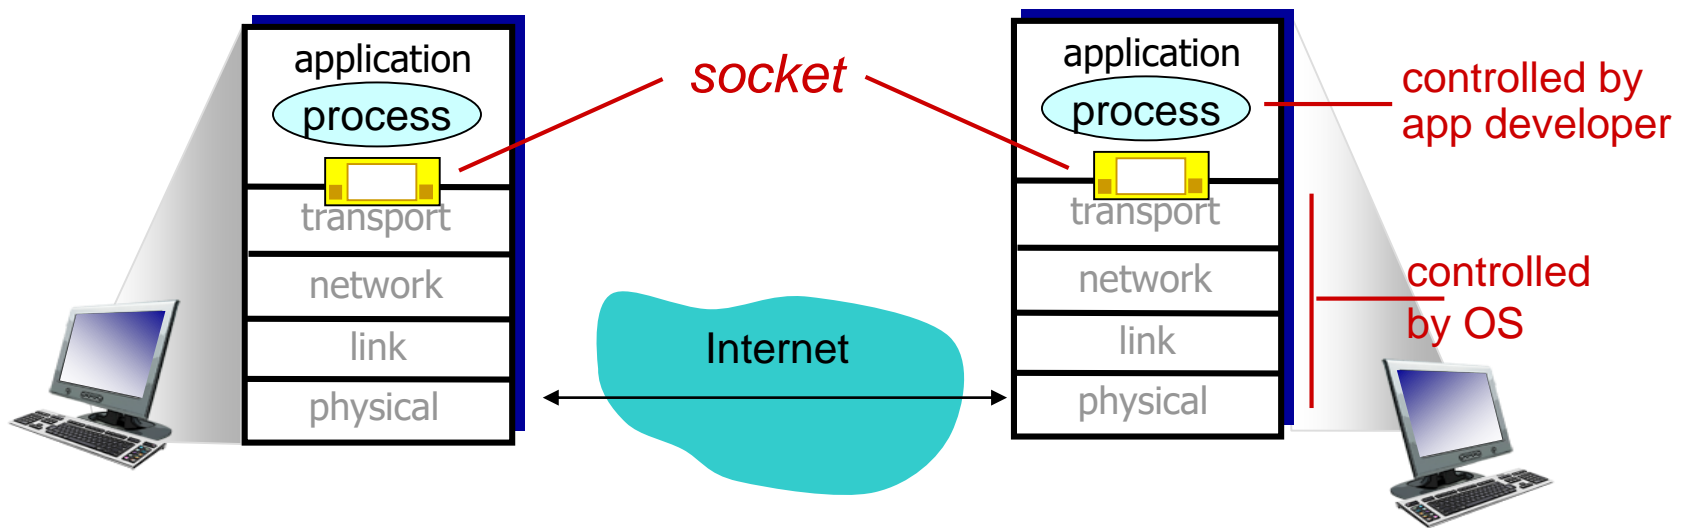

Socket programming

Two socket types for two transport services:

- **UDP:** unreliable datagram
- **TCP:** reliable, byte stream-oriented

Socket programming *with* UDP

UDP: no “connection” between client & server

- ❖ no handshaking before sending data
- ❖ sender explicitly attaches IP destination address and port # to each packet
- ❖ rcvr extracts sender IP address and port# from received packet

UDP: transmitted data may be lost or received out-of-order

Application viewpoint:

- ❖ UDP provides *unreliable* transfer of groups of bytes (“datagrams”) between client and server

Client/server socket interaction: UDP

server (running on *serverIP*)

create socket, port= x:
`serverSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
read datagram from
`serverSocket`

↓
write reply to
`serverSocket`
specifying
client address,
port number

client

create socket:
`clientSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
Create datagram with server IP and
port=x; send datagram via
`clientSocket`

↓
read datagram from
`clientSocket`

↓
close
`clientSocket`

Example app: UDP client

Python UDPClient

include Python's socket library

```
from socket import *
serverName = 'hostname'
serverPort = 12000
clientSocket = socket(socket.AF_INET,
                       socket.SOCK_DGRAM)
message = raw_input('Input lowercase sentence:')
clientSocket.sendto(message,(serverName, serverPort))
modifiedMessage, serverAddress =
clientSocket.recvfrom(2048)
print modifiedMessage
clientSocket.close()
```

create UDP socket for server

get user keyboard input

Attach server name, port to message; send into socket

read reply characters from socket into string

print out received string and close socket

Example app: UDP server

Python UDPServer

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(('', serverPort))
print "The server is ready to receive"
while 1:
    message, clientAddress = serverSocket.recvfrom(2048)
    modifiedMessage = message.upper()
    serverSocket.sendto(modifiedMessage, clientAddress)
```

create UDP socket →

bind socket to local port number 12000 →

loop forever →

Read from UDP socket into message, getting client's address (client IP and port) →

send upper case string back to this client →

Socket programming *with TCP*

client must contact server

- ❖ server process must first be running
- ❖ server must have created socket (door) that welcomes client's contact

client contacts server by:


- ❖ Creating TCP socket, specifying IP address, port number of server process
- ❖ *when client creates socket:* client TCP establishes connection to server TCP

- ❖ when contacted by client, *server TCP creates new socket* for server process to communicate with that particular client
 - allows server to talk with multiple clients
 - source port numbers used to distinguish clients (more in Chap 3)

Client/server socket interaction: TCP

server (running on `hostid`)

client

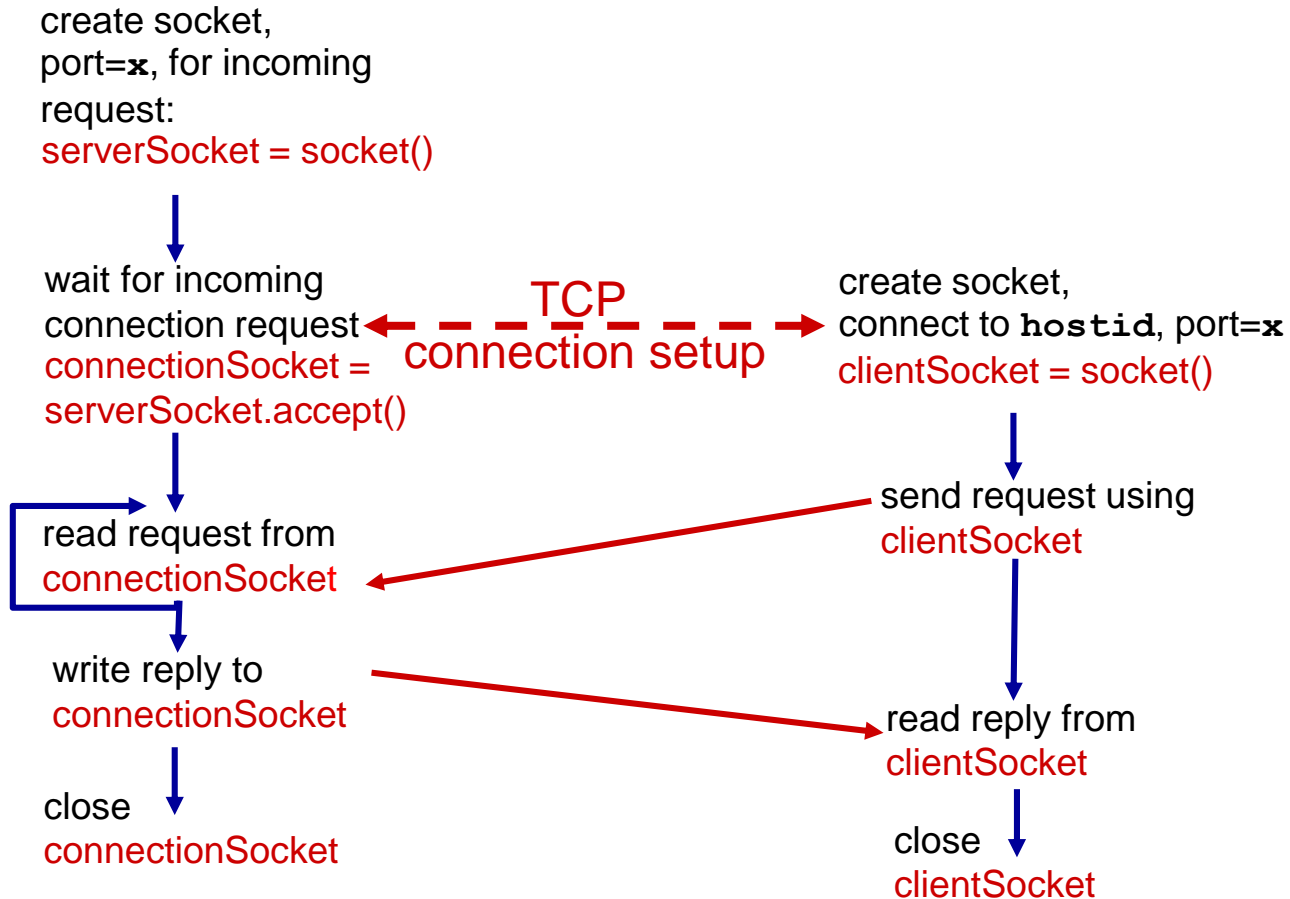

Example app:TCP client

Python TCPClient

```
from socket import *
serverName = 'servername'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName,serverPort))
sentence = raw_input('Input lowercase sentence:')
clientSocket.send(sentence)
modifiedSentence = clientSocket.recv(1024)
print 'From Server:', modifiedSentence
clientSocket.close()
```

create TCP socket for
server, remote port 12000



No need to attach server
name, port



Example app: TCP server

Python TCP Server

create TCP welcoming
socket



server begins listening for
incoming TCP requests



loop forever



server waits on accept()
for incoming requests, new
socket created on return



read bytes from socket (but
not address as in UDP)



close connection to this
client (but *not* welcoming
socket)



```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET,SOCK_STREAM)
serverSocket.bind(('',serverPort))
serverSocket.listen(1)
print 'The server is ready to receive'
while 1:
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024)
    capitalizedSentence = sentence.upper()
    connectionSocket.send(capitalizedSentence)
    connectionSocket.close()
```

Chapter 2: summary

our study of network apps now complete!

- ❖ application architectures
 - client-server
 - P2P
- ❖ application service requirements:
 - reliability, bandwidth, delay
- ❖ Internet transport service model
 - connection-oriented, reliable: TCP
 - unreliable, datagrams: UDP
- ❖ specific protocols:
 - HTTP
 - FTP
 - SMTP, POP, IMAP
 - DNS
 - P2P: BitTorrent, DHT
- ❖ socket programming: TCP, UDP sockets

Next class

- ❖ Lab assignment due by **this Sunday!**

- ❖ Please read Chapter 3.1-3.3 of your textbook **BEFORE** Class